


### CRIMP LUGS HEAVY DUTY PLATED COPPER

- 100% pure copper crimp terminals
- Crimp or Solder connections



Cable Gauge	Cable Square (mm <sup>2</sup> )	Stud Size (Inches)	Stud Size (mm)	Dimensions					Pack of 2	Box of 10	Box of 100
				Length (A)	Width (B)	(C)	(D)	(E)			
16	1.5	3/16	5	18	8	1.0	9	7	-	MA1-5B10	MA1-5B100
16	1.5	1/4	6	20	10	0.8	11	7	-	MA1-6B10	MA1-6B100
13	3	3/16	5	20	10	0.8	11	7	-	MA2-5B10	MA2-5B100
13	3	1/4	6	20	10	0.8	11	7	-	MA2-6B10	MA2-6B100
11	4	1/4	6	22	10	1.0	11	9	-	MA4-6B10	MA4-6B100
11	4	5/16	8	26	12	0.8	15	9	-	MA4-8B10	MA4-8B100
9	6	1/4	6	27	12	1.0	15	9	-	MA6-6B10	MA6-6B100
9	6	5/16	8	27	12	1.0	15	9	-	MA6-8B10	MA6-8B100
7	10	1/4	6	27	12	1.8	14	10	-	MA10-6B10	MA10-6B100
7	10	5/16	8	29	14	1.5	16	10	MA10-8BL2	MA10-8B10	MA10-8B100
7	10	3/8	10	32	16	1.3	19	10	MA10-10BL2	MA10-10B10	MA10-10B100
6	14	1/4	6	37	11	2.3	14	19	-	MA16-6B10	MA16-6B100
6	14	3/16	8	39	14	1.7	16	19	MA16-8BL2	MA16-8B10	MA16-8B100
6	14	3/8	10	41	16	1.5	18	19	MA16-10BL2	MA16-10B10	MA16-10B100
3	27	1/4	6	41	13	2.0	18	20	-	MA25-6B10	MA25-6B100
3	27	3/16	8	41	14	2.4	16	21	MA25-8BL2	MA25-8B10	MA25-8B100
3	27	3/8	10	44	16	2.0	19	21	MA25-10BL2	MA25-10B10	MA25-10B100
2	35	1/4	6	44	15	3.5	17	21	-	MA35-6B10	MA35-6B100
2	35	5/16	8	44	16	3.0	18	21	MA35-8BL2	MA35-8B10	MA35-8B100
2	35	3/8	10	46	18	2.6	20	21	MA35-10BL2	MA35-10B10	MA35-10B100
2	35	1/2	12	50	20	2.3	24	21	MA35-12BL2	MA35-12B10	MA35-12B100
0	54	1/4	6	44	18	3.1	20	17	-	MA50-6B10	MA50-6B100
0	54	3/16	8	47	18	4.0	21	20	MA50-8BL2	MA50-8B10	MA50-8B100
0	54	3/8	10	48	18	3.2	20	22	MA50-10BL2	MA50-10B10	MA50-10B100
0	54	1/2	12	52	21	2.7	24	22	MA50-12BL2	MA50-12B10	MA50-12B100
00	67	3/16	8	54	20	3.5	22	23	MA70-8BL2	MA70-8B10	MA70-8B100
00	67	3/8	10	54	21	3.3	24	24	MA70-10BL2	MA70-10B10	MA70-10B100
00	67	1/2	12	54	21	3.3	24	24	MA70-12BL2	MA70-12B10	MA70-12B100
000	95	3/8	10	60	25	3.9	26	27	MA95-10BL2	MA95-10B10	MA95-10B100
000	95	1/2	12	60	25	3.9	26	27	MA95-12BL2	MA95-12B10	MA95-12B100

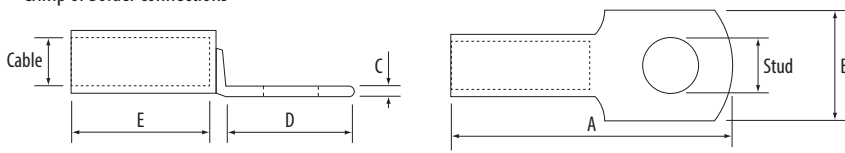

### MAGPL1 CABLE LUG ASSORTMENT PACK

- 10 pieces of: MA1-5, MA1-6, MA2-5, MA2-6, MA4-8, MA6-6, MA6-8, MA10-6, MA10-10, MA16-6, MA16-8, MA16-10



### MAGPL2 CABLE LUG ASSORTMENT PACK

- 10 pieces of: MA25-8, MA25-10, MA35-8, MA35-10, MA35-12, MA50-10, MA50-12
- 5 pieces of: MA70-10, MA70-12, MA95-12