

The logo for Bikeservice features a red circular icon with three slanted lines on the left. To its right, the word "Bikeservice" is written in a bold, red, italicized sans-serif font. Above the 'i' in "Bikeservice", there is a red graphic element resembling a stylized motorcycle headlight or a drop. Below the brand name, the words "Motorcycle Service Tools" are written in a smaller, black, sans-serif font.

**Bikeservice**<sup>®</sup>  
Motorcycle Service Tools



EXCLUSIVELY DISTRIBUTED BY  
**TRIDON** 



Bikeservice® is a dedicated motorcycle tool program to meet the requirements of the motorcycle repair industry and is suited to professional repairers and DIY enthusiasts.

The Bikeservice® range of motorcycle tools is designed, engineered and developed specifically for motorcycle maintenance, tuning and servicing. Bikeservice® understands the need for specific motorcycle service tools, not just general automotive tools.

Extensive research of motorcycles and existing tools in the market ensures Bikeservice® is at the forefront of motorcycle tool offerings. Research and development is ongoing to provide high quality products and the most up-to-date range to service new and old motorcycles.

Bikeservice® is a leading Taiwanese specialty tool brand, distributed exclusively in Australia and New Zealand by Tridon Australia Pty Ltd.



# CONTENTS


|                                       | Page |                                 | Page |
|---------------------------------------|------|---------------------------------|------|
| <b>ENGINE SERVICE</b>                 | 2    | <b>TYRE &amp; WHEEL</b>         | 27   |
| Compression Testing                   | 2    | Tyre Changing Tools             | 27   |
| Engine Overhaul                       | 3    | Tyre Pressure & Tread Depth     | 29   |
| Valve Adjustment                      | 5    | Wheel Cleaning                  | 30   |
| Cooling System                        | 6    | Wheel Balancing & Spoke Tension | 31   |
| Oil Service                           | 7    | Wheel Removal Tools             | 32   |
| <b>FUEL &amp; EXHAUST</b>             | 9    | <b>ELECTRICAL SERVICE</b>       | 33   |
| Mixture & Synchronisation             | 9    | Battery & Wiring Harness        | 33   |
| Sensor Sockets                        | 9    | Ignition Service                | 35   |
| <b>CLUTCH &amp; TRANSMISSION</b>      | 10   | <b>CABLE SERVICE</b>            | 36   |
| Clutch Hub & Counter Balancer Sockets | 10   | <b>GENERAL WORKSHOP</b>         | 37   |
| Clutch Nut Wrenches                   | 11   | <b>HAND TOOLS</b>               | 39   |
| Clutch Spring Compressors             | 12   | Hose Tools                      | 39   |
| Flywheel Pullers                      | 13   | Keys & Bits                     | 41   |
| <b>STEERING &amp; SUSPENSION</b>      | 16   | Picks, Brushes & Scrapers       | 42   |
| Front Fork & Rear Shock Service       | 16   | Pliers, Clamps & Cutters        | 44   |
| Steering Stem Service                 | 20   | Screwdrivers                    | 45   |
| Seal & Bearing Retainer Tools         | 22   | Sockets & Ratchets              | 45   |
| <b>BRAKE SERVICE</b>                  | 23   | Spanners & Wrenches             | 47   |
| Brake Overhaul                        | 23   | Stud Removers                   | 49   |
| Brake Pad & Bleeding                  | 24   | T-Handles                       | 49   |
| <b>BEARING SERVICE</b>                | 25   | Tool Kits                       | 52   |
| <b>CHAIN &amp; BELT SERVICE</b>       | 26   | <b>ALPHABETICAL INDEX</b>       | 55   |
|                                       |      | <b>NUMERICAL INDEX</b>          | 58   |

## BS8001

### CYLINDER COMPRESSION TEST KIT

- Designed specifically for testing motorcycle and small engine compression
- Features a 70mm dual scale gauge (0-300PSI / 0-20kg/cm<sup>2</sup>) with chrome bezel and quick coupler fitting
- Supplied with three 12" hose adaptors featuring quick coupler attachments
- Compression tester and hose lengths are designed for optimal viewing alongside engine
- Covers most popular motorcycle and small engine plug sizes (16, 18, 21mm)
- Supplied in a protective metal case
- Thread sizes: M10 x 1.0, M12 x 1.25, M14 x 1.25

User Manual



Hose Adaptors

Compression Test Gauge



#### CONTENTS

| Part No. | Description            | Specification                      |
|----------|------------------------|------------------------------------|
| BS8001A  | Compression Test Gauge | 0-300PSI (0-20kg/cm <sup>2</sup> ) |
| BS8001B  | Hose Adaptor           | M10 x 1.0                          |
| BS8001C  | Hose Adaptor           | M12 x 1.25                         |
| BS8001D  | Hose Adaptor           | M14 x 1.25                         |

## BS8002

### CYLINDER LEAK DOWN TEST KIT

- Designed to check the amount of cylinder leakage in 4-stroke engines
- The system will pressurise the cylinder to 60 PSI and register the total percentage of leakage past the rings, head gasket and valves
- Gauge features pressure regulator and quick coupler connection
- Supplied with four 270mm flexible hose adaptors rated to 300PSI
- Covers plug sizes 16, 18, 21mm plus M18 hose for vacuum pump
- Thread sizes: M10x1.0, M12x1.25, M14x1.25, M18x1.25
- Air input: 70-160 PSI

User Manual



#### CONTENTS

| Contents | Description        | Specification |
|----------|--------------------|---------------|
| BS8002A  | Leakage Test Gauge | -             |
| BS8002B  | Hose Adaptor       | M10 x 1.0     |
| BS8002C  | Hose Adaptor       | M12 x 1.25    |
| BS8002D  | Hose Adaptor       | M14 x 1.25    |
| BS8002E  | Hose Adaptor       | M18 x 1.25    |

## BS3039

### PISTON RING PLIERS

- Used to remove and install piston rings during engine overhaul
- Tapered jaws hold and expand piston rings easily over piston
- Ratcheting function handle holds piston rings steady during removal and installation
- Suitable for piston rings: 35mm - 111mm (1 3/8" - 4 3/8")



## BS3032

### PISTON RING COMPRESSOR SET

- The ideal compressor set for quick top end rebuilds or serious engine overhauls
- Supplied with piston ring plier and swivel type compression plier
- Swivel type compression plier can be used parallel or perpendicular to the cylinder block, ideal for use in confined work spaces
- Ratcheting plier function holds the piston ring in position for easy installation
- Supplied in a protective metal case
- Suitable for piston rings: 35mm - 111mm (1 3/8" - 4 3/8")



## BS2300

### CRANKCASE SEPARATOR TOOL SET

- Simple and effective puller set to suit most two and four stroke engines that have a vertically split crankcase
- Moveable fingers allow for a multitude of bolt patterns
- Includes mounting bolts, forcing screw and three-leg frame
- Infinite adjustment of 3 leg frame
- Supplied in a protective metal case
- Spread: 50-240mm



User Manual



#### CONTENTS

| Description            | Specification    | Qty |
|------------------------|------------------|-----|
| 3 Leg Frame            | Spread: 50-240m  | 1   |
| Forcing Screw          | M14 x 1.5        | 1   |
| Mounting Bolts         | M8 x 1.25 x 90mm | 3   |
| Mounting Bolt Adaptors | M6 x 1.0         | 3   |

## BS23021

### ALTERNATOR COVER PULLER - DUCATI

- Twin-pull style puller used to remove the alternator cover from Ducati Motorcycles
- Eliminates the need for prying or impact tools to remove the cover
- Ideal tool for general inspections or for installing a lightweight flywheel
- Used with 17mm hex driver
- Robust all metal construction
- Suits: All modern Ducati Motorcycles



**BS23050**

## CRANKSHAFT TURNING TOOL - DUCATI

- Enables rotation of the engine safely during valve clearance check or timing setting
- Used with 6mm hex key and 17mm hex driver
- Made from chrome molybdenum alloy steel for durability and long service life
- Suits: all modern Ducati's from 1990 to 2011



**BS3550**

## CAM CHAIN BREAKING & RIVETING TOOL KIT

- Compact tool kit for quick and trouble free cam chain replacement
- Provides the ability to break and rivet cam chain master links
- Ideal companion during major servicing and engine overhauls
- Forged hardened alloy steel body and components
- Includes body, handle and push pins
- Suits chain plate quantity: 2x3, 3x4, 4x5
- Instruction manual included



**BS2302**

## TIMING PLUG WRENCH

- Designed for removal and replacement of straight slot timing and inspection plugs
- Suits Honda, Kawasaki, Suzuki, Yamaha etc
- Robust all metal construction
- Blade sizes: 16mm (5/8"), 22mm (7/8") and 38mm (1 1/2")



## PISTON LOCATING TOOLS

- Designed for visually indicating the relative crankshaft and piston position at top dead centre
- Insert the tool and adjust accordingly so that it contacts the dome of the piston before it can pass through TDC
- Fine-tune by eye or with degree wheel until actual TDC is reached
- Ideal for camshaft timing in addition to the timing marks
- Polyoxymethylene (POM) tip prevents piston damage
- Three thread sizes available to accommodate common spark plug ports


| Part No.      | Thread      |
|---------------|-------------|
| <b>BS2250</b> | M10 x P1.0  |
| <b>BS2251</b> | M12 x P1.0  |
| <b>BS3074</b> | M14 x P1.25 |



**BS9947**

## VALVE SPRING COMPRESSOR SET

- For use during removal and servicing of engine valves and seals upon cylinder head or engine repair
- Supplied with 3 interchangeable adaptors of most common sizes
- Suitable for small and large motorcycles
- Durable fixed U-frame features strong ACME threads
- Manufactured with reinforced frames from rust-proofed steel
- Adaptor sizes: 19, 23 and 25mm

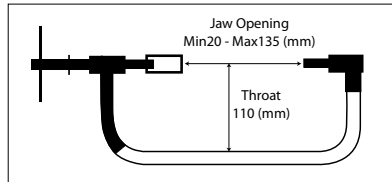

**BS3105**

## FEELER GAUGE 16 BLADE METRIC/SAE

- 16 stainless steel blades
- Tapered blade design
- Metric and SAE sizing
- Metric size range: 0.05-0.38mm
- SAE size range: 0.002"-0.015"



| Metric | 0.05  | 0.08  | 0.10  | 0.15  | 0.20  | 0.25  | 0.30  | 0.38  |
|--------|-------|-------|-------|-------|-------|-------|-------|-------|
| SAE    | 0.002 | 0.003 | 0.004 | 0.006 | 0.008 | 0.010 | 0.012 | 0.015 |

## FEELER GAUGES – FIXED TYPE

- Designed for accurately checking and adjusting valve clearance
- Double-ended fixed blade design
- Inlet and exhaust gauges available

| Part No.       | Type    | Size        |
|----------------|---------|-------------|
| <b>BS3109A</b> | Inlet   | 0.05-0.10mm |
| <b>BS3109B</b> | Exhaust | 0.13-0.18mm |



## VALVE SPRING COLLET REMOVERS

- Removes split collets when compressing valve springs on 4 stroke engines
- Holds valve spring collets in position during replacement
- Suits most 4 stroke motorcycle engines



| Part No.      | Size                       |
|---------------|----------------------------|
| <b>BS9828</b> | 18 x 9mm                   |
| <b>BS9829</b> | 14.5 x 7mm plus 5mm hollow |

## BS2201

### TAPPET ADJUSTING TOOL SET 6PC

- Includes three sockets and three adjusters to allow nine different combinations
- Hollow socket design makes tappet adjustment an easy single operation
- Knurled edge provides a positive grip on adjusters
- Suitable for most motorcycles and ATVs with screw-type tappet adjustments
- Includes 3 x hex wrenches, 2 x square adjusters and 1 x flat blade adjuster



#### CONTENTS

| Part No. | Description             | Specification | Qty |
|----------|-------------------------|---------------|-----|
| BS2201A  | Square adjuster         | 3mm           | 1   |
| BS2201B  | Square adjuster         | 4mm           | 1   |
| BS2201F  | Flat blade adjuster     | 4mm           | 1   |
| BS2201C  | Tappet Adjusting Wrench | 8mm Hex       | 1   |
| BS2201D  | Tappet Adjusting Wrench | 9mm Hex       | 1   |
| BS2201E  | Tappet Adjusting Wrench | 10mm Hex      | 1   |

## BS0244

### COOLING SYSTEM & RADIATOR PRESSURE TEST SET

- Hand operated pump builds and displays pressure quickly to locate leaks in cooling and radiator systems
- Dual scale pressure gauge (PSI / Bar) features 300mm hose and push-button pressure release valve
- Includes attachments to test both cooling system and radiator caps
- Supplied in a foam lined metal case
- Kit suits most makes and models including Triumph, Ducati, BMW, Aprilia, Honda, Kawasaki, Suzuki, Yamaha and KTM



#### CONTENTS

| Part No. | Description           | Specification        | Qty |
|----------|-----------------------|----------------------|-----|
| BS0244A  | Pressure Test Gauge   | 0-2.5 BAR (0-36 PSI) | 1   |
| BS0244B  | Radiator Tank Adaptor | 28mm Dia. Plunger    | 1   |
| BS0244C  | Radiator Tank Adaptor | 25mm Dia. Plunger    | 1   |
| BS0244D  | Radiator Cap Adaptor  | Black                | 1   |
| BS0244E  | Radiator Cap Adaptor  | Red                  | 1   |
| BS0244F  | Cap Pressure Adaptor  | -                    | 1   |



**BS8006**

## PORTABLE OIL DRAIN CAN 4 LITRE

- For evacuation and storage of fluids
- Ensures safe transportation and storage without spillage
- Manufactured from hardened durable plastic
- Air bleed screw allows efficient oil capture and draining during the oil-changing process
- Capacity: 4 litre



**BS2551**

## FLEXIBLE SPOUT FUNNEL


- Aluminium funnel for easy, efficient and mess free fluid and oil transfer
- Flexible spout allows ease of access in confined spaces or difficult to reach reservoirs
- Convenient handle for secure grip and mess free operation
- Flexible spout length: 600mm



**BS2501**

## OIL FILTER & CLUTCH HUB SOCKET

- Specialised lug type socket for removing and installing counter balancers, clutch hubs and some oil filters
- Made of heat-treated steel
- 3/8" square drive
- Style: 4 Point
- Size: 24.0mm I.D. x 4 point
- Suits: most Honda models



**BS6656**

## UNIVERSAL OIL FILTER WRENCH 3 LEG

- Allows easy removal of cartridge style oil filters even in tight locations
- Vinyl dipped legs minimise filter damage
- 3/8" square drive
- Suits filter diameter: 63 - 99mm



## BS6659

### OIL FILTER WRENCH SET 8PC

- Fluted cup style oil filter wrench set allows easy removal of filters even in confined spaces
- Cup style design grips like a socket minimising the possibility of damage to filters
- 8 piece set combines most popular applications
- Made from alloy steel and coated with electro-black oxide finish for durability and rust proofing
- Supplied on sturdy socket rail type holder
- Workable up to 85 ft.lb
- 3/8" square drive
- Wrenches also available individually



#### CONTENTS


| Part No. | Image   | Size                      | Suits  | Qty |
|----------|---|---------------------------|--|-----|
| BS6661   |    | 65mm<br>14 Flute          | Benelli, Buell, Kawasaki, MV Agusta, Triumph, Yamaha and Honda OEM No. 15410-MM9-003, application oil filter No. PH6017  | 1   |
| BS6663   |   | 68mm<br>14 Flute          | Aprilia, Bimoto, Cagiva, Kawasaki, Kymco, Triumph, Suzuki, application oil filter No. Suzuki Part No. 16510-06B00, other No.S 10-55660, 10-55670                       | 1   |
| BS6664   |  | 74mm<br>15 Flute          | Harley-Davidson, Honda, Kawasaki, Suzuki, application oil filter No. 10-82411, 1007800 and No. 10-07700 for Harley-Davidson, PH6022, PH6010                            | 1   |
| BS6665   |  | 76mm<br>8 Flute           | BMW, Harley-Davidson, Ducati Part No. S 090549960, Moto Guzzi Part No. 2314900   | 1   |
| BS6666   |  | 76mm<br>12 Flute          | Aprilia, BMW, Gilera, Malaguti, Peugeot, Piaggio   | 1   |
| BS6667   |  | 76mm<br>14 Flute + window | BMW Part No. S 11421, No. S 460845, Harley-Davidson Part No. 63805-80A, No. 63806-83, Honda, Suzuki, Kawasaki  | 1   |
| BS6669   |  | 80mm<br>15 Flute          | Honda Part No. 15410-MJO-003, No. 15410-MBO-003 and No. 15410-MJO-004, Kawasaki Part No. 16097-1054, Suzuki Part No. 165-05A00, other oil filter No. PH6811 and PH8212 | 1   |
| BS6670   |  | 82mm<br>15 Flute          | Honda Part No. 51334   | 1   |

**BS8117**

## CARBURETOR SYNCHRONISER VACUUM GAUGE SET

- Set contains four precision gauges, each with its own damping control
- Gauges are mounted to a portable heavy duty metal base for bench top use
- 4 x 1200mm hoses, clamps and fittings included
- Supplied in protective metal case
- Suitable for multi carburetor balancing

User Manual

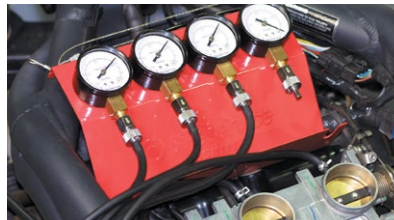

**BS0058**

## CARBURETOR ADJUSTING TOOL SET

- Designed for those hard-to-reach air/fuel mixture screws on most multi-cylinder motorcycles
- Special angled drive design assists in aligning the bit with the carburetor adjustment screw
- 9 piece set includes Flat, Phillips (PH2) & D-type bits
- Supplied in a durable metal case

### CONTENTS

| Description  | Length mm | Qty |
|--------------|-----------|-----|
| D Type Bit   | 40        | 1   |
| PH2 Bit      | 35        | 1   |
| PH2 Bit      | 58        | 1   |
| Flat 5mm Bit | 35        | 1   |
| Flat 5mm Bit | 58        | 1   |


| Description           | Length mm | Qty |
|-----------------------|-----------|-----|
| Flat 5mm Bit          | 95        | 1   |
| Auxiliary Handle      | -         | 1   |
| 90° Slot Blade Holder | -         | 1   |
| 90° Bit Holder        | -         | 1   |



## CARBURETOR ADJUSTING DRIVERS

- Ideal for air/fuel mixture screws in confined spaces
- Ergonomic finger snap driver handle has been designed specifically to make sensitive carburetor adjustment effortless

| Part No.      | Description            | Type     | Length mm |
|---------------|------------------------|----------|-----------|
| <b>BS0231</b> | Flat Blade Screwdriver | 4mm Flat | 250       |
| <b>BS0059</b> | D Type Socket Driver   | D-Type   | 165       |

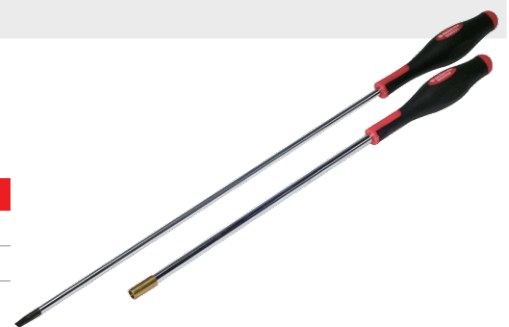

## SWITCH & SENSOR SOCKETS

- Specialist sockets designed for the removal and installation of vacuum switches and oxygen sensors in motorcycle applications
- Manufactured from durable chrome molybdenum steel for superior strength and longevity
- 3/8" square drive



**BS4107**



**BS4224C**

| Part No.       | Description          | Size        |
|----------------|----------------------|-------------|
| <b>BS4107</b>  | Vacuum Switch Socket | 22mm (7/8") |
| <b>BS4107A</b> | Vacuum Switch Socket | 11/16"      |
| <b>BS4224</b>  | Oxygen Sensor Socket | 22mm (7/8") |
| <b>BS4224C</b> | Oxygen Sensor Socket | 11/16"      |



## CLUTCH HUB & COUNTER BALANCER SOCKETS

- Specialised lug type sockets for removing and installing counter balancers and clutch hubs
- Made of heat-treated steel
- Available in 4 and 6 point configurations
- \* Denotes double ended and supplied with 75mm Extension Bar



| Part No.       | I.D. Size mm | Type            | Depth mm | Spec |
|----------------|--------------|-----------------|----------|------|
| <b>BS2493</b>  | 28.5         | 4 Point (6.0mm) | 65.0     |      |
| <b>BS3004</b>  | 12.5         | 6 Point (3.5mm) | 25.0     |      |
| <b>BS3002</b>  | 17.5         | 4 Point (4.5mm) | 75.0     |      |
| <b>BS3001</b>  | 20.5         | 4 Point (6.0mm) | 27.5     |      |
| <b>BS3003</b>  | 24.0         | 4 Point (5.5mm) | 50.0     |      |
| <b>BS3009</b>  | 29.0         | 4 Point (6.0mm) | 30.0     |      |
| <b>BS3000*</b> | 21.0         | 4 Point (5.5mm) | 20.0     |      |
|                | 23.5         | 4 Point (5.5mm) | 25.0     |      |
| <b>BS3008*</b> | 26.5         | 4 Point (5.5mm) | 20.0     |      |
|                | 30.0         | 4 Point (5.5mm) | 20.0     |      |

## CLUTCH NUT WRENCHES

- Specialised lock nut wrenches for removal and installation of clutch lock nuts
- Ergonomic comfort grip handle
- 6 point design



| Part No. | Size mm |
|----------|---------|
| BS9861   | 34      |
| BS9862   | 39      |
| BS9863   | 41      |
| BS9864   | 46      |

### BS9853

## PULLEY NUT WRENCH – DUAL SIZE

- "T" type dual head pulley wrench is used in conjunction with a locking wrench while torquing the pulley nut
- Dual size suits common applications
- Soft grip handle
- Style: 12 Point
- Size: 14, 17mm



### BS3112

## UNIVERSAL PULLEY HOLDING WRENCH SET

- Vice grip style locking wrench holds clutch hubs, flywheels, gears, pulley and sprockets during lock nut removal and installation
- Durable handle and adjustable locking design
- 5 pairs of different size pins to suit common applications
- Jaw capacity: 140mm
- Pin working capacity: 22-145mm

User Manual




## PULLEY & CLUTCH OUTER HOLDING WRENCHES

- Specially designed wrenches mount to pulleys and clutch baskets preventing rotation while torquing the locknut
- Ergonomic comfort grip handle



| Part No. | Style    | Size mm | Suits   |
|----------|----------|---------|---------|
| BS9854   | 4 Slot   | -       | Various |
| BS9855   | 4 Prong  | -       | Honda   |
| BS9856   | 12 Point | 32      | Various |
| BS9857   | 6 Point  | 29      | Yamaha  |
| BS9858   | 3 Point  | 26      | Yamaha  |
| BS9859   | 4 Point  | 36      | Yamaha  |

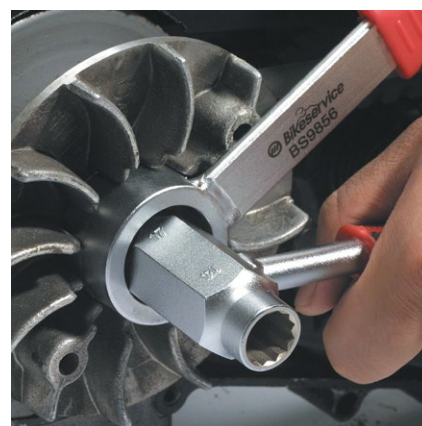

# CLUTCH & TRANSMISSION | CLUTCH SPRING COMPRESSOR

BS67500

## CLUTCH SPRING COMPRESSOR — HARLEY-DAVIDSON

- Essential tool used to compress the clutch spring for removal and installation of the retainer ring during clutch replacement
- 5/16" UNF internal thread for all Big Twin (1990-1997)
- 7/16" UNF external thread for all XL models (1991-2005)
- Includes all Buell ® (1991-2003) and Buell ® Blast, except 1125R
- OEM reference: 38515



## BS3913

### FLYWHEEL PULLER KIT

- Universal four point pulling system for the removal of clutch bodies, flywheels and primary gear assemblies
- Supplied with a bolt selection of varied lengths to accommodate various applications
- Manufactured from durable chrome vanadium steel
- 18 piece set
- Spread: 30-100mm
- Reach: 110mm (max)



#### CONTENTS

| Name                      | Qty |
|---------------------------|-----|
| Bolts - M6 x 1.0 x 20mm   | 3   |
| Bolts - M6 x 1.0 x 45mm   | 3   |
| Bolts - M8 x 1.25 x 45mm  | 3   |
| Bolts - M8 x 1.25 x 90mm  | 3   |
| Bolts - M10 x 1.5 x 125mm | 3   |

| Name          | Qty |
|---------------|-----|
| Flange        | 1   |
| Forcing Screw | 1   |
| Nose Piece    | 1   |
| Washers       | 6   |

## BS9950

### 6 IN 1 MAGNETO FLYWHEEL PULLER

- Specially designed tool for the standard AC flywheel wheel ring
- 6 sizes to fit most magneto flywheel threads
- Since some flywheels are the taper lock style, they can only be disengaged using this specialist tool
- Use with soft face hammer for quick removal from tapered shafts
- Sizes: M10 x 1.25 RH, M14 x 1.5 RH, M16 x 1.5 RH, M18 x 1.5 RH, M24 x 1.0 RH, M27 x 1.0 LH
- Threads: external



## MAGNETO FLYWHEEL PULLERS

- Threaded pullers designed for removing magneto flywheels
- Available for internal and external, left and right hand thread types
- Chrome alloy steel ball tip on shaft to reduce friction stress during disassembly
- 1/2" square drive (21mm Hex)

Application List



| Part No.      | Thread Size | Thread Type   | Length mm |   | Part No.      | Thread Size | Thread Type   | Length mm |   |
|---------------|-------------|---------------|-----------|---|---------------|-------------|---------------|-----------|---|
| <b>BS2460</b> | M24 x P1.0  | Internal      | 110       |    | <b>BS2442</b> | M24 x P1.0  | RH - External | 15        |    |
| <b>BS2401</b> | M14 x P1.5  | RH - External | 65        |    | <b>BS2478</b> | M24 x P1.5  | RH - External | 15        |    |
| <b>BS2402</b> | M16 x P1.5  | RH - External | 65        |    | <b>BS2470</b> | M26 x P1.0  | RH - External | 15        |    |
| <b>BS2403</b> | M18 x P1.5  | RH - External | 65        |  | <b>BS2479</b> | M26 x P1.5  | RH - External | 15        |  |
| <b>BS2404</b> | M20 x P1.5  | RH - External | 45        |  | <b>BS2443</b> | M27 x P1.0  | LH - External | 15        |  |
| <b>BS2405</b> | M22 x P1.5  | RH - External | 45        |  | <b>BS2444</b> | M27 x P1.25 | RH - External | 15        |  |
| <b>BS2441</b> | M19 x P1.0  | RH - External | 15        |  | <b>BS2472</b> | M28 x P1.0  | RH - External | 15        |  |
| <b>BS2475</b> | M20 x P1.0  | RH - External | 15        |  | <b>BS2471</b> | M28 x P1.5  | RH - External | 15        |  |
| <b>BS2476</b> | M22 x P1.0  | RH - External | 15        |  | <b>BS2473</b> | M30 x P1.5  | RH - External | 15        |  |
| <b>BS2477</b> | M22 x P1.5  | RH - External | 15        |  | <b>BS2474</b> | M33 x P1.5  | RH - External | 15        |  |





| Part No. | Thread Size | Thread Type | Length mm |
|----------|-------------|-------------|-----------|
|----------|-------------|-------------|-----------|

|               |            |                      |    |   |
|---------------|------------|----------------------|----|---|
| <b>BS2421</b> | M18 x P1.5 | RH - External-Hollow | 16 |    |
| <b>BS2422</b> | M18 x P1.5 | RH - External-Hollow | 32 |    |
| <b>BS2423</b> | M20 x P1.5 | RH - External Hollow | 15 |    |
| <b>BS2424</b> | M20 x P1.5 | RH - External-Hollow | 30 |  |
| <b>BS2483</b> | M24 x P1.0 | RH - Internal        | -  |  |
| <b>BS2461</b> | M24 x P1.5 | RH - Internal        | -  |  |
| <b>BS2462</b> | M26 x P1.0 | RH - Internal        | -  |  |
| <b>BS2484</b> | M28 x P1.0 | RH - Internal        | -  |  |
| <b>BS2463</b> | M30 x P1.5 | RH - Internal        | -  |  |
| <b>BS2464</b> | M30 x P1.0 | RH - Internal        | -  |  |

| Part No. | Thread Size | Thread Type | Length mm |
|----------|-------------|-------------|-----------|
|----------|-------------|-------------|-----------|

|               |             |               |   |   |
|---------------|-------------|---------------|---|---|
| <b>BS2485</b> | M30 x P1.25 | RH - Internal | - |    |
| <b>BS2465</b> | M30 x P1.5  | RH - Internal | - |    |
| <b>BS2486</b> | M32 x P1.5  | RH - Internal | - |    |
| <b>BS2467</b> | M33 x P1.5  | RH - Internal | - |  |
| <b>BS2487</b> | M35 x P1.0  | RH - Internal | - |  |
| <b>BS2468</b> | M35 x P1.5  | RH - Internal | - |  |
| <b>BS2469</b> | M35 x P1.5  | RH - Internal | - |  |
| <b>BS2488</b> | M38 x P1.5  | RH - Internal | - |  |
| <b>BS2489</b> | M42 x P1.5  | RH - Internal | - |  |
| <b>BS2494</b> | M50 x P1.5  | RH - Internal | - |  |

## AXLE ALIGNMENT TOOLS - DUCATI

- Essential tools for aligning the front axle on Ducati motorcycles with Showa and Ohlins suspension
- Correctly aligns the axle with the notch on the fork bottom during axle tightening
- Alignment of the front axle is critical to allow access to the compression damping screw for suspension adjustment
- T-bar handle provides an easy and secure grip when correctly aligning the axle with the notch on the fork bottom during axle tightening



| Part No.       | Suspension Type | Axle I.D. mm | Ducati Application  |
|----------------|-----------------|--------------|---|
| <b>BS55301</b> | Showa           | 25           | 748, 749, 916, 996, 998, 999, ST2, ST3, ST4, 800SS and 1000SS               |
| <b>BS55302</b> | Ohlins          | 25           | Hypermotard 796 and 1100  |
| <b>BS55303</b> | Ohlins          | 30           | Panigale 848, 1198 and 1199, Streetfighter 848, Multistrada 1200 and Diavel |

## C-HOOK WRENCHES

- Tempered C-hook wrenches are specially designed for use with slotted retaining rings
- Thin hook can access confined areas in motorcycle steering and suspension (4mm thickness)
- Manufactured from chrome vanadium hardened steel



| Part No.      | Size                                |
|---------------|-------------------------------------|
| <b>BS0350</b> | 19-51mm (3/4" - 2") dia.            |
| <b>BS0351</b> | 32-76mm ( 1 1/4" - 3") dia.         |
| <b>BS0352</b> | 51-120mm (2" - 4 3/4") dia.         |
| <b>BS0353</b> | 118-158mm (4 21/32" - 6 7/32") dia. |

## FORK DUST SEAL DRIVERS

- Detachable driver enables front fork oil seals with an inner tube to be installed easily and accurately
- Knurled finish to provide a positive grip during use
- Full range of driver sizes to suit most forks (21 sizes)
- For models not listed in application list, check fork diameter and select driver size accordingly

Application List



| Part No.       | Size | Part No.       | Size | Part No.       | Size |
|----------------|------|----------------|------|----------------|------|
| <b>BS9827Q</b> | 27mm | <b>BS9827D</b> | 36mm | <b>BS9827K</b> | 43mm |
| <b>BS9827R</b> | 30mm | <b>BS9827E</b> | 37mm | <b>BS9827L</b> | 45mm |
| <b>BS9827S</b> | 31mm | <b>BS9827F</b> | 38mm | <b>BS9827M</b> | 46mm |
| <b>BS9827A</b> | 32mm | <b>BS9827G</b> | 39mm | <b>BS9827V</b> | 47mm |
| <b>BS9827B</b> | 33mm | <b>BS9827H</b> | 40mm | <b>BS9827N</b> | 48mm |
| <b>BS9827T</b> | 34mm | <b>BS9827J</b> | 41mm | <b>BS9827W</b> | 49mm |
| <b>BS9827C</b> | 35mm | <b>BS9827U</b> | 42mm | <b>BS9827P</b> | 50mm |



## FRONT FORK CAP SOCKETS

- Specially designed sockets to remove octagonal front fork caps and cartridge compression bodies
- Use with 3/8" square drive or 19mm Hex



| Part No.      | Image | Size mm | Suspension Type | Application  | Part No.      | Image | Size mm | Suspension Type  | Application   |
|---------------|-------|---------|-----------------|--|---------------|-------|---------|------------------|---|
| <b>BS4030</b> |       | 45      | Showa BPF       | —  | <b>BS4033</b> |       | 50      | Showa            | Honda CRF 250R/450R, CRF 250X/450X, Suzuki RM125/250, RMZ 250/450, Kawasaki KC250F. Replaces Suzuki P/No. 09941-53630 |
| <b>BS4031</b> |       | 46      | Showa           | —  | <b>BS4052</b> |       | 32      | KYB Twin Chamber | Honda CRF 250 and CRF 450   |
| <b>BS4032</b> |       | 49      | KYB             | Honda CRF 450R, Yamaha YZ125/250, YZ250F/450F, Kawasaki KC450F | <b>BS4051</b> |       | 36      | KYB Twin Chamber | Yamaha YZ series. Replaces Yamaha P/No. YM-01500  |

Reference to manufacturer's part numbers are solely for identification purposes

## FRONT FORK BIT SOCKET SETS

- 3 piece bit socket sets designed for front shock absorber adjustment
- Adjust shock absorbers to different situations and riding habits
- Bit sockets allow a working angle up to 30°, provide improved access to hard-to-reach areas and allow angle access to the fastener
- 1/2" square drive




| Part No.      | Description            | Sizes         |
|---------------|------------------------|---------------|
| <b>BS9730</b> | Hex Bit Socket Set     | 8, 10, 12mm   |
| <b>BS9731</b> | Tx-Star Bit Socket Set | T45, T50, T55 |
| <b>BS9732</b> | Spline Bit Socket Set  | 8, 10, 12mm   |

## FRONT FORK ADJUSTING WRENCHES

- Wrenches specifically designed for compression fork cap and steering stem adjustment or removal
- Flat shape head is ideal for hard-to-reach fork caps and steering stem nuts where access may be obstructed by handle bars etc.
- Single size wrenches allow for use of 3/8" torque wrench or ratchet

| Part No.      | Type                  | Sizes mm |
|---------------|-----------------------|----------|
| <b>BS4000</b> | Dual size - 6 point   | 17, 24   |
| <b>BS4002</b> | Dual size - 6 point   | 17, 27   |
| <b>BS4006</b> | Dual size - 6 point   | 19, 24   |
| <b>BS4003</b> | Dual size - 6 point   | 19, 27   |
| <b>BS4004</b> | Dual size - 6 point   | 22, 27   |
| <b>BS4005</b> | Dual size - 6 point   | 22, 32   |
| <b>BS4001</b> | Dual size - 12 point  | 30, 32   |
| <b>BS3101</b> | Dual size - 8 point   | 46, 50   |
| <b>BS3102</b> | Dual size - 8 point   | 49, 50   |
| <b>BS4012</b> | Single size - 6 point | 35       |
| <b>BS4013</b> | Single size - 6 point | 36       |
| <b>BS4014</b> | Single size - 6 point | 39       |

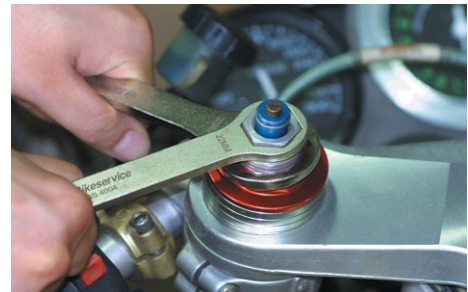

## BS41500

### FORK OIL LEVEL GAUGE


- Simple and effective tool for checking and adjusting the oil level on conventional and single chamber cartridge forks
- Graduated steel tube with adjustable level setting ring measures oil level from 0-300mm in 5mm increments
- Can also be used on bicycles equipped with front suspension
- Syringe capacity: 60ml
- Gauge: 0-300mm, 5mm increments



## BS4100

### HYDRAULIC COIL SPRING COMPRESSION TOOL

- Bench mountable spring press frame enables secure and precise suspension disassembly and reassembly
- Hydraulic jack design provides effortless operation
- Includes flat-top spacer to easily interchange top bearing component assemblies
- Ideal for mono shock maintenance and overhaul
- Operation height: 350mm
- Width: 20-80mm
- Stroke: 135mm

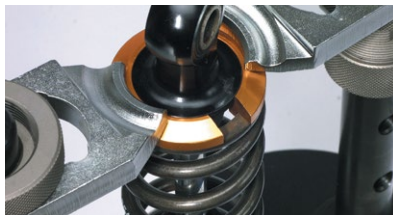

## BS5000

### FRONT FORK VICE

- The fork vice is designed to hold round or awkward shaped items including forks, shocks, pistons
- Simply bolt vice to work area using the pre-drilled mounting holes
- Unique V shape jaws are covered with thick rubber pads to ensure items are held in place without damage
- Four position pin allows for wide range of opening sizes
- Made from hardened steel with anodised finish
- Rotary function enables convenient fork access
- Max. opening: 100mm



**BS6500**

## GRIP END CUTTER

- Three piece grip cutter designed to assist with hand grip installation
- Durable steel construction provides a clean cut
- Includes two cutter sizes to suit popular models
- Cutter 1: 22.2mm (7/8")
- Cutter 2: 25.4mm (1")
- Handle length: 150mm



**BS9892**

## STEERING TUBE BEARING PULLER KIT

- Press frame puller system used to remove the lower steering stem bearing
- Bearing separator features extra thin jaws for entry between triple clamp and bearing
- Rod extensions mean tool can be used on multiple sizes of steering stems
- Supplied in a protective metal case
- Bearing Separator: 30-56mm
- Reach: 240-320mm
- Ratchet Wrench: 17, 19mm



User Manual



**BS4201**

## STEERING BEARING OUTER RACE REMOVER

- Enables easy outer race removal while avoiding tube damage
- Four contact points ensure even distribution of force
- Remove plastic protection ears prior to use
- Size: 39-57mm (1 1/2-2 3/16") tube diameter
- Length: 320mm (12 1/2")



## BS98940

### STEERING HEAD BEARING INSTALLER MASTER KIT

- Vital tool to correctly install steering head bearings
- A hassle free system reducing the possibility of damage during the bearing installation process
- Heavy duty centre axle used with Polyoxymethylene (POM) press rings ensure the bearing is installed straight and smoothly in one motion
- No press, drift or impact tools required
- Suits bearing diameter sizes: 41-55mm

User Manual



| Item | Description           | Size mm   | Suits   |
|------|-----------------------|-----------|---|
| 1    | Press Cap             | -         | -   |
| 2.1  | Press Ring            | 41mm      | Honda   |
| 2.2  | Press Ring            | 43mm      | Suzuki, Yamaha  |
| 2.3  | Press Ring            | 47mm      | Kawasaki, Suzuki, Yamaha, Honda, Triumph, Montesa                         |
| 2.4  | Press Ring            | 48mm      | Suzuki, Yamaha, Kawasaki  |
| 2.5  | Press Ring            | 48.6mm    | Honda   |
| 2.6  | Press Ring            | 50mm      | Honda, KTM, Husaberg, Buell, Husqvarna, Victory, Harley-Davidson          |
| 2.7  | Press Ring            | 51mm      | Honda, TM   |
| 2.8  | Press Ring            | 51.5mm    | Kawasaki, Suzuki, Yamaha, Honda, Triumph                                  |
| 2.9  | Press Ring            | 55mm      | Kawasaki, Suzuki, Yamaha, Honda, Triumph, TM, Aprilia, Ducati, Moto Guzzi |
| 3    | Press Plate           | -         | -   |
| 4    | Rotate-Locking Holder | -         | -   |
| 5    | Central Axle          | 410mm (L) | -   |
| 6    | T-Bar                 | -         | -   |



## BS9893

### STEERING TUBE BEARING INSTALLER KIT

- Simple and safe approach to steering tube bearing installation
- Includes installation drift and five adaptors to accommodate most popular sizes
- Simply choose the correct adaptor, slide the setting driver over the steering tube and tap the bearing into place with a soft hammer
- Ideal solution to reduce risk of damaging components
- Adaptor sizes: 24, 26, 27, 28, 30mm



## BS4019

### STEERING STEM NUT TOOL – DUCATI

- Ensures correct torque is achieved to the steering head compression nut
- Rubber cushion design eliminates damage to the steering stem nut in the removal and installation process
- 3/8" square drive enables use of torque wrench when installing
- Suits: Ducati motorcycles 1992 on including all 4V Superbikes, Multistrada, Hypermotard and other models with the large diameter steering stem nut and replaces Ducati tool P/No. 888713.10580



### SEAL & BEARING RETAINER TOOLS

- Specially designed sockets for rear wheel bearing, seal retaining ring and accessory fork cap removal and replacement
- Precision design prevents damage to the retaining ring after peined "stakes" have been removed
- Available in 4 and 6 point configurations

| Part No. | Type/Size               | Slot | Suits       |
|----------|-------------------------|------|-------------|
| BS4018   | ø 36mm x 4 point (Span) | 12mm | Honda       |
| BS4008   | ø 40mm x 4 point        | -    | Honda       |
| BS4009   | ø 40mm x 4 point (Span) | 12mm | Honda & KTM |
| BS4010   | ø 44mm x 6 point        | -    | Honda       |
| BS4011   | ø 47mm x 6 point        | -    | Honda       |





**BS5800**

## BRAKE PISTON DETACHING TOOL

- Extracts pistons from the caliper during service and overhaul
- Ratcheting handle holds position allowing hands to be free
- Suitable for caliper pistons with internal diameters of 20-54mm
- All metal construction
- Size: 20-54mm



**BS5810**

## SEALING RING ASSEMBLY TOOL SET 4PC

- Tapered tool set for pulling o-rings or sleeves onto brake components and hydraulic systems without risk of damage
- Size range: 14.4-22.4mm (9/16"-7/8")




### CONTENTS

| Part No. | Size Range                        | Qty |
|----------|-----------------------------------|-----|
| BS5810A  | ø 14.4 - 16.0mm (9/16" - 5/8")    | 1   |
| BS5810B  | ø 15.9 - 17.5mm (5/8" - 11/16")   | 1   |
| BS5810C  | ø 17.5 - 19.1mm (11/16" - 13/16") | 1   |
| BS5810D  | ø 20.7 - 22.4mm (13/16" - 7/8")   | 1   |

## SPRING HOOKS

- Convenient hook handle used to remove exhaust springs, seat or tank holding springs, side stand springs and brake springs
- Easier and safer to use than pliers
- T-handle grip for comfortable easy use
- Made from heat treated low carbon steel

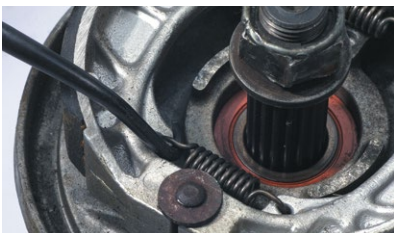

| Part No.      | Description                   | Length |
|---------------|-------------------------------|--------|
| <b>BS0044</b> | Headlight & Brake Spring Hook | 150mm  |
| <b>BS5201</b> | U Hook Handle                 | 220mm  |

**BS5582**

## VACUUM PUMP & BRAKE BLEEDING KIT

- Designed to locate and identify faults on motorcycles
- Assists with troubleshooting fuel, diagnostics, transmission and emissions systems
- Bleeds hydraulic brake and clutch systems - one-man operation
- Die cast pump body with gauge and accessory kit including three connector sizes and various adaptors
- Easily dismantled for cleaning
- Supplied in metal case

User Manual



Suction Cups



Bleed Nipple Adaptor



Hose Fittings



Gun Fitting and Tube Adaptors



### CONTENTS

| Part No. | Description                 | Qty |
|----------|-----------------------------|-----|
| BS5582A  | Vacuum Pump                 | 1   |
| BS5582B  | Fluid Container             | 1   |
| BS5582C  | PVC Vacuum Hose Set 4pc     | 1   |
| BS5582D  | Assorted Fittings Pack 16pc | 1   |
| BS5582E  | Fluid Container O'Ring      | 1   |

## DISC BRAKE SPREADERS

- Compresses the brake pistons on most calipers during brake pad replacement
- Suits all front and some rear disc brake applications
- Simple and compact design makes pad changes quick and easy



**BS9870**



**BS9871**



| Part No.      | Jaw Width | Jaw Thickness | Spread   |
|---------------|-----------|---------------|----------|
| <b>BS9870</b> | 30mm      | 3mm           | 6.5-43mm |
| <b>BS9871</b> | 68mm      | 3mm           | 6.5-55mm |

## BS4326

### BEARING PACKER

- Simple and effective bearing packer
- Enclosed casing so grease stays in the tool cavity, not on your hands
- Clear casing allowing visual inspection
- Simple hand operation
- Suits: Bearings up to 89mm (3 1/2")



## BS5535

### FRONT WHEEL BEARING REMOVAL TOOL SET

- Split collet puller set for radial ball bearing removal
- Expanding the split collet tightens the grip on the inside of the bearing during removal
- Ideal for the removal of wheel bearings, pinions, oil seals etc.
- Sliding hammer and adaptors to suit ball bearing inner diameter sizes from 15mm to 30mm
- Hand grip protector prevents hand injuries when striking
- 10 piece set supplied in a protective metal case
- Collet sizes: 15, 17, 20, 25, 28, 30mm

User Manual



### BUSH DRIVERS

- Comprehensive kits specifically designed for removal and replacement of bearings and oil seals
- Features tapered cone drivers, manufactured from aluminium for damage free bearing and oil seal replacement
- Available in Metric and SAE

| Part No.      | Description                | Size        |
|---------------|----------------------------|-------------|
| <b>BS9144</b> | Bush Drive Set Metric 17pc | 10-42mm     |
| <b>BS9145</b> | Bush Drive Set SAE 19pc    | 3/8"-1 3/8" |



BS9144



BS9145

#### CONTENTS

| Item          | Part No. BS9144                     | Part No. BS9145                     |                       |
|---------------|-------------------------------------|-------------------------------------|-----------------------|
| Drive Handles | 1. 11 x 105mm (for 10-20mm adaptor) | 1. 11 x 105mm (for 10-20mm adaptor) |                       |
|               | 2. 16 x 130mm (for 10-20mm adaptor) | 2. 16 x 130mm (for 10-20mm adaptor) |                       |
|               | 3. 20 x 142mm (for 10-42mm adaptor) | 3. 20 x 142mm (for 10-42mm adaptor) |                       |
| Bush Adaptors | 1. 10-12mm                          | 8. 22-24mm                          |                       |
|               | 2. 12-14mm                          | 9. 25-27mm                          |                       |
|               | 3. 14-16mm                          | 10. 28-30mm                         |                       |
|               | 4. 15-17mm                          | 11. 30-34mm                         |                       |
|               | 5. 16-18mm                          | 12. 32-36mm                         |                       |
|               | 6. 18-20mm                          | 13. 35-40mm                         |                       |
|               | 7. 20-22mm                          | 14. 38-42mm                         |                       |
|               |                                     | 1. 3/8"-7/16"                       | 9. 13/16"-15/16"      |
|               |                                     | 2. 7/16"-1/2"                       | 10. 7/8"-1"           |
|               |                                     | 3. 1/2"-9/16"                       | 11. 15/16"-1 1/16"    |
|               |                                     | 4. 9/16"-5/8"                       | 12. 1"-1 1/8"         |
|               |                                     | 5. 5/8"-11/16"                      | 13. 1 1/16" - 1 3/16" |
|               |                                     | 6. 5/8"-3/4"                        | 14. 1 1/8"-1 1/4"     |
|               |                                     | 7. 11/16"-13/16"                    | 15. 1 3/16"-1 5/16"   |
|               |                                     | 8. 3/4"-7/8"                        | 16. 1 1/4" - 1 3/8"   |

**BS4532**

## BELT TENSION GAUGE

- Easily and accurately tests belt tension using applied force
- Compact design with graduated scale on body and plunger enables accurate measuring and adjustment to manufacturer's specification
- Designed to work with all belt drive models
- Body scale: 0-3.5 inches
- Plunger scale: 0-10 Lbs



User Manual




**BS35101**

## CHAIN BREAKING & RIVETING KIT

- Comprehensive tool kit for drive chain replacement and repair
- Provides the ability to break, rivet and press drive chain master links
- Forged hardened alloy steel body with 3 position handle suitable for left and right handed use
- Supplied with press plates, punches and anvils
- Features knock spindle, a timing saving tool to flatten and shape pins
- Instruction manual included
- Suits: Chain sizes: #415, 420, 428, 520, 525, #30 (50), 532, 630 and 632
- Replacement pin sets available P/No. BS35105

User Manual

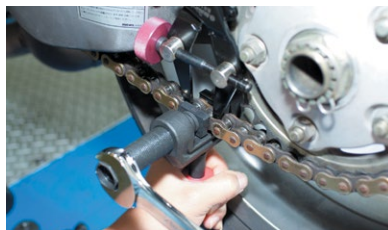

**BS3500**

## CHAIN LINK EXTRACTOR

- Spring loaded clamp designed for chain repair
- Once clamped behind linkage the forcing screw quickly and easy removes rivet pin
- Ergonomic soft grip handle to support tool during operation
- Grind chain pin heads prior to use
- Suits: No. 5 size chain



**BS3506**

## CHAIN LINK PLIERS


- Designed for easy installation and removal of clip type master chain links
- Specialised jaws grip and work chain link to ensure secure fitment during maintenance
- Comfortable, oil resistant moulded handles



**BS1164**

## DRIVE CHAIN TENSIONER

- Designed for drive chains found on motorcycles and all-terrain vehicles (ATVs)
- Tensions and holds chain in position leaving hands free for easy removal or installation of the connector or master link
- Caliper type design is simple and effective making chain replacement quick and easy

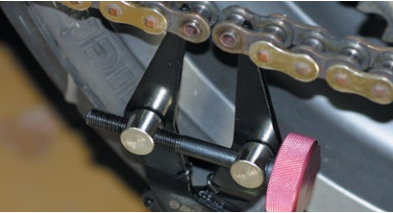

# TYRE & WHEEL | TYRE CHANGING TOOLS

**BS3949**

## VALVE CORE TORQUE TOOL


- Ensures accurate torquing of tyre valves reducing the potential for leakage
- Solid plastic grip handle
- Pre-set to 4 in.lbs



**BS5510**

## MULTI-FUNCTION TYPE VALVE TOOL 4 IN 1


- Four in one tool for tyre valve maintenance
- Incorporates valve installer and remover, pressure release, valve core installer and valve thread chaser in the one handy tool
- Length: 250mm

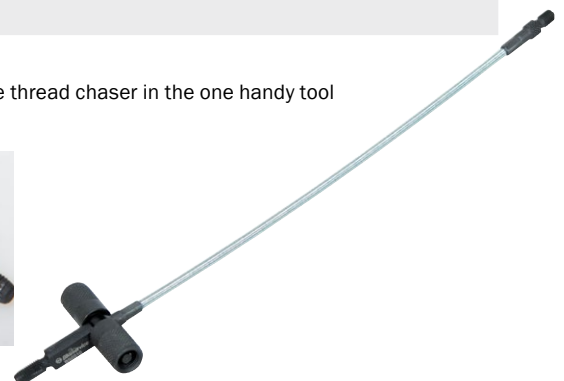

**BS3699**

## TYRE VALVE EXTRACTOR BAR

- Steel bar with movable rubber sleeve offers maximum leverage during removal and installation of snap-in tyre valves
- Moveable rubber sleeve prevents damage to alloy wheels
- Length: 380mm

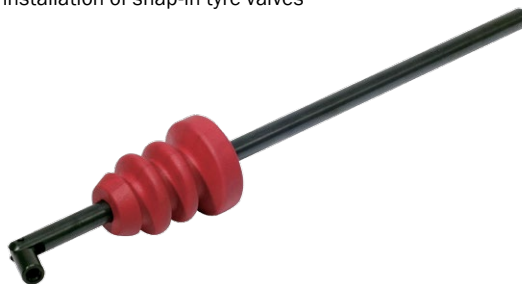

**BS8008**

## TYRE CHANGE EXTRUDER TOOL

- Convenient tool used to assist in tyre changing on common alloy wheel rims
- Simply hooks over wheel rim at the bead to hold the tyre down
- Pushes the tyre bead down into the centre of the rim allowing room for tyre levers
- Suitable for general road or sport motorcycles with alloy wheel rims



**BS3701**

## TYRE BEAD HOLDING TOOL

- Convenient tool used to assist in tyre changing on spoked wheel rims
- Simply hooks over spoke and inside the rim to hold the tyre down
- Pushes the tyre bead down into the centre of the rim allowing room for tyre levers
- Suitable for cruiser, classic, adventure and supermoto motorcycles or any with spoked wheel rims



**BS5610**

## TYRE BEAD HOLDING TOOL

- Designed to push and hold the bead down into the centre of the rim during installation and repair of off road tyres
- Assists when using tyre levers to remove tyres
- Hardened nylon screw protects rim



**BS9952**

## RIM PROTECTOR SET 3PC

- Protects wheel rims from damage during tyre removal and installation
- Protector mounts over bead section of wheel rim providing a protective area for leverage with tyre lever
- Includes safety cord on each protector
- Made from durable hardened plastic
- 3 piece set
- Length: 150mm (each)



## TYRE LEVERS

- Professional quality tyre levers manufactured from hardened and tempered drop forged chrome vanadium steel
- Designed for motorcycle tyre replacement
- Features oil resistant ergonomic handle (BS9953 only)
- Various lengths available





| Part No.      | Description              |
|---------------|--------------------------|
| <b>BS5603</b> | Tyre Lever - 200mm (8")  |
| <b>BS9953</b> | Tyre Lever - 280mm (11") |
| <b>BS5612</b> | Tyre Lever - 350mm (14") |
| <b>BS5604</b> | Tyre Lever - 400mm (16") |



**BS3211**

## TYRE PRESSURE & TREAD DEPTH GAUGE

- Pencil style gauge checks tyre pressure and tyre tread depth
- Features a 45° head angle for convenient valve access
- Fast and simple to use
- All metal construction
- Pressure range: 0-50 PSI (0-350 KPa)
- Tread depth range: 0-10mm / 0-32 unit (1/32")

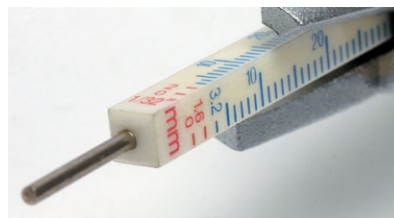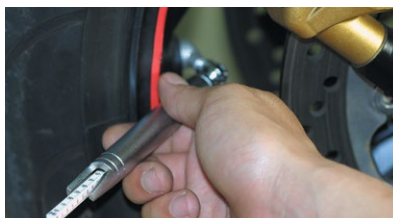

**BS3238**

## DIGITAL TYRE PRESSURE GAUGE

- Fast and accurate digital tyre pressure gauge ideal for all types of motorcycle valves
- Angled nozzle helps to reach tyre valves where access is limited
- Calibrated in Bar, kPa and PSI, change measuring unit at the push of a button
- One hand operation, accurate digital LCD reading
- Auto Power off for low power consumption
- Pressure range: 2-100 PSI (0.15-7.00 Bar)
- Accuracy: +1% +0.5 PSI
- Resolution: 0.5 PSI (0.05 Bar or 5 kPa)
- Operating temperature: 10-30°C (50-86°F)
- Power: 3V Lithium battery



**BS3212**

## AUTOMATIC DIGITAL TYRE INFLATOR

- Accurately indicates and automatically adjusts tyre pressure
- Simply set the desired tyre pressure and the tool will automatically inflate or deflate tyre to reach desired pressure
- Pre-set functions for accurate pressure and automatic cut off when desired pressure is achieved
- 4 digit LCD display shows tyre pressure value and setting parameters
- Heavy duty aluminium body is solid and durable
- Use with standard workshop air supply (100-180 PSI)
- Input voltage: AC 100V-240V 50/60Hz – supplied with charger
- Calibrated in PSI, Bar, kPa and kgf/cm2
- Accuracy: ± 0.5%
- Range: 0-200 PSI
- Hose length: 650mm

User Manual



**BS9506**

## WHEEL CLEANING BRUSH

- Soft bristle wheel cleaning brush suitable for both alloy and wire wheels
- Soft bristles ensure no scratching occurs
- Bendable to reach awkward areas
- Length: 240mm





## BS5502

### SPOKE TORQUE WRENCH 22PC

- Dual-head spoke wrench enables tightening and removal of spokes in one piece
- Spoke torque tensioner applies correct and equal tension to the spokes
- Spoke remover releases damaged or rusted spokes easily
- Features an o-ring seal in both ends for dust proofing
- Simply tighten the spoke until you hear and feel a click which indicates that the spoke is adjusted correctly
- Takes all the guesswork out of wheel and spoke assembly and maintenance
- 11 steel and 11 alloy interchangeable heads included
- Torque pre-set at: 4 ft.lbs
- Sizes: 5.0, 5.6, 5.8, 6.0, 6.2, 6.3, 6.5, 6.7, 6.8, 7.1mm & Spline
- Replacement adaptor sets available:
  - BS5562 Alloy Torque End Adaptor Set 11pc
  - BS5563 Steel Fixed End Adaptor Set 11pc





## BS5501

### WHEEL TURNING & BALANCING STAND

- All in one motorcycle wheel balancing stand with adjustable legs and moulded all-round reading level to ensure extremely accurate and reliable wheel balancing
- Adjustable centring coned rods on ball bearings
- Complete with dial gauge for accurately checking wheel runout
- Capacity: 460mm (18")
- Maximum width: 370mm (14 1/2")

User Manual

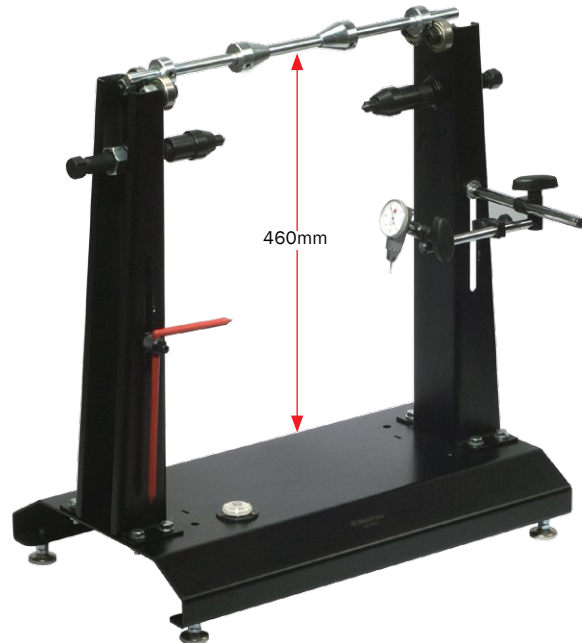

## BS5530

### FRONT WHEEL SPINDLE REMOVAL TOOL

- Multi-fit wheel removal tool to suit female hexagonal axles
- Designed to fit most spindles during front wheel removal
- 4 sizes in 1 tool to cover most modern motorcycle applications
- Knurled centre ring for hand use to start thread
- 3/8" square drive
- Sizes: 17, 19, 22, 24mm (6 Point)



### INTERNAL AXLE NUT HEX SOCKETS

- Hex bit sockets designed for motorcycle front wheel removal
- Suits late model road bikes with 14mm or 19mm I.D. front axle
- 1/2" square drive
- Maximum torque: 150 ft.lbs
- Style: 6 Point (Hex)





| Part No.      | Size |
|---------------|------|
| <b>BS5531</b> | 14mm |
| <b>BS5532</b> | 19mm |



### WHEEL LOCK NUT SOCKETS

- Dual size alloy wheel nut socket for front and rear axles
- Designed to break if overtightened eliminating damage to expensive locknuts, spindles or swing arms
- Maximum torque: 280-320Nm
- 1/2" square drive



| Part No.      | Image   | Size 1 | Size 2 | Style                         | Suits   |
|---------------|---|--------|--------|-------------------------------|---|
| <b>BS5552</b> |  | 26mm   | 56mm   | 12 point                      | MV Agusta F4 and Brutale all models   |
| <b>BS5553</b> |  | 28mm   | 30mm   | 6 point                       | Ducati 748, 916, 996, 998, Superbike 848, Hypermotard 798, 1100, Monster 696, 796, 1100, and any Ducati with a 25mm front axle    |
| <b>BS5551</b> |  | 30mm   | 55mm   | 6 point (30)<br>12 point (55) | Ducati Superbike 1098, 1198, Multistrada 1200, Streetfighter and Diavel   |
| <b>BS5550</b> |  | 41mm   | 46mm   | 6 point                       | Ducati 748, 916, 996, 998, Superbike 848, Hypermotard 798, 1100, Monster 796, 1100, and others with 41 or 46mm hex rear wheel nut |

## BS1040

### BATTERY ACID FILLER


- Safe and efficient way to fill dry charged batteries
- Avoids spilling and damage in confined spaces
- Thumb release controls acid flow
- Clear fill chamber for visual level check
- "Cell-Eye" indicates when battery is full
- Ideal for Scooters and Jet ski's



## BS1020

### BATTERY TERMINAL TOOL KIT 2PC



- Quickly and easily remove corrosion and dirt from cable, clamps and terminal posts
- 5 functions ideal for battery maintenance
- Functions: pick, SS cleaning brush, scraper, gapper, Phillips screwdriver
- 2 piece set

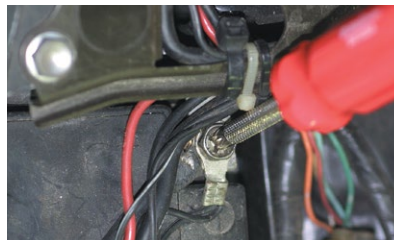

## BS9484


### PROFESSIONAL WIRE STRIPPER

- Designed for stripping and cutting copper and aluminium wires
- Plier nose allows easy gripping of components
- Spring loaded handle operation
- Heat treated alloy steel
- Wire capacity: 0.6-2.6mm

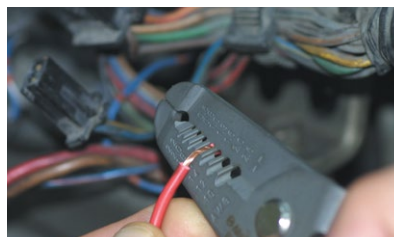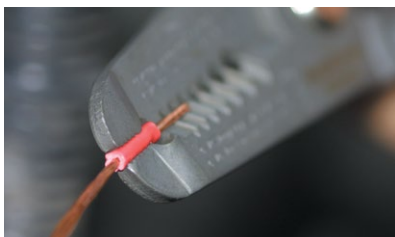

## WIRE TERMINAL TOOLS


- Designed for easy removal of terminals and wires from electrical connectors
- Reduces risk of damage to wires, terminals and connectors
- Rectangular blades for pack-con terminals, flat blade to open connectors, fork for ALDL connectors
- Prongs depress the "barbs" on conventional terminals
- All metal construction ensures strength and rigidity on stubborn connectors

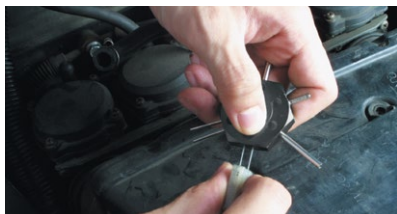

| Part No.      | Style           |
|---------------|-----------------|
| <b>BS1814</b> | Terminal Block  |
| <b>BS1815</b> | General Purpose |

## HEAT SHRINK

- Protects and insulates components and wires
- Adhesive lined inner wall seals and protects against moisture preventing corrosion
- Quick and simple to shrink by heat gun
- Shrink temp: 70-120°C
- Operating temp: -55-125°C
- RoHS compliant
- Supplied in protective plastic case
- Waterproof (BS1031 only)

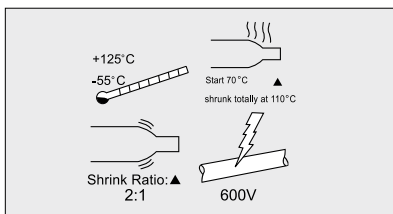

**BS1030**



**BS1031**

| Part No.      | Description                           | Shrink Ratio |
|---------------|---------------------------------------|--------------|
| <b>BS1030</b> | Heat Shrink Tube Set 171pc            | 2:1          |
| <b>BS1031</b> | Waterproof Heat Shrink Tube Set 106pc | 3:1          |

**IGNITION LEAD REMOVAL TOOLS - BMW**

- Designed to release the spark plug high tension coil on BMW motorcycles
- Simple and effective tool to eliminate the possibility of damage to the coil assembly or spark plug lead during removal
- Manufactured from light weight strong durable plastic



**BS12900**



**BS12901**

| Part No.       | Description   |
|----------------|---|
| <b>BS12900</b> | BMW R259 single spark ignition systems (All R1100 and R1150 models before 2003 model year)  |
| <b>BS12901</b> | BMW R1150 twin spark models (2004 and later), All R1200 models (except R1200 C and CL), All F800 models plus F650 GS Twin, K1200 S, R, R-Sport, K1300 S, R and GT |

**SPARK PLUG SOCKETS – THIN WALL**

- Extra thin wall deep sockets designed to access narrow spark plug holes found on many motorcycles
- Hardened chrome vanadium steel with inbuilt rubber insert to hold plug during installation
- 3/8" square and hex drive





| Part No.      | Size mm |
|---------------|---------|
| <b>BS9132</b> | 14      |
| <b>BS9133</b> | 16      |
| <b>BS9134</b> | 18      |
| <b>BS9135</b> | 21      |

**BS1298**

**SPARK PLUG MAINTENANCE KIT 6PC**


- Specialised spark plug tools including gap adjusting ring and 6 files
- Specially designed hole can adjust the gap width of the spark plug without pressuring the centre electrode
- Tapered edge sets spark plug gaps from 0.50 to 2.25mm (0.020" to 0.100")
- 5 thin mini files designed for ignition points and electrode cleaning
- Range: 0.50-2.25mm (0.020"-0.100")

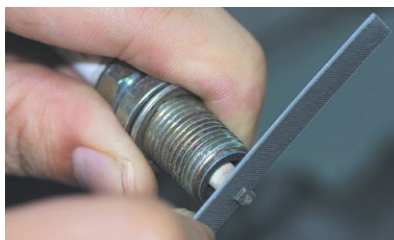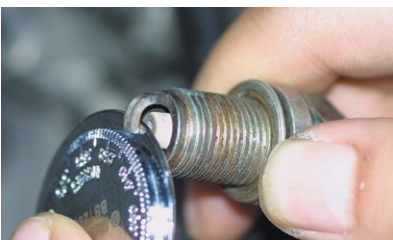

## BS4531

### CABLE WIRE LUBRICATION TOOL

- Designed to lubricate throttle and clutch cables
- Lubricating motorcycle cables prolongs service life and reduces risk of breakage
- Simple operation injects lubricant into cable housing
- Clamps over housing and wire allowing an aerosol can lubricant to be connected
- Once lubricant runs out the far end, the cable is lubricated
- Fast and easy to use on or off the motorcycle
- Suits: throttle and clutch cables

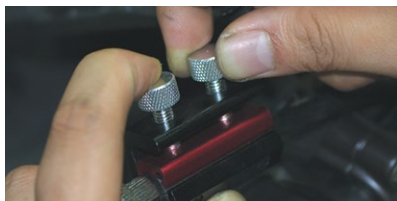

### CABLE REPLACEMENT TOOLS

- Bullet shape tools connect one end of old cable wire and one end of new cable enabling ease of cable replacement without damage



| Part No.      | Description            | Size                   |                             |
|---------------|------------------------|------------------------|-----------------------------|
| <b>BS9835</b> | Cable Replacement Tool | 3mm Side Lock, 5mm Hex | Accelerator & Clutch Cables |
| <b>BS9836</b> | Cable Replacement Tool | M5 x P0.8              | Brake Cables                |
| <b>BS9838</b> | Cable Replacement Tool | M6 x P1.0              |                             |

## BS1501

### CABLE REPLACEMENT TOOL – TACHOMETER


- Wiring harness tool for tachometer cable replacement
- Simply connect the cable and retrieve the substitute cable
- Ergonomic moulded handle provides a positive grip during operation
- Thread: M12 x 1.0
- Cable Length: 1100mm



## BS1034

### WIRE RETAINING TOOL

- Designed to firmly hold cables, wires and fasteners during removal and replacement
- The stainless steel rope allows cables and lines to be pulled through confined spaces
- Fastest and most efficient way to remove cables and wires during replacement
- Net diameter: 20mm
- Cable length: 450mm

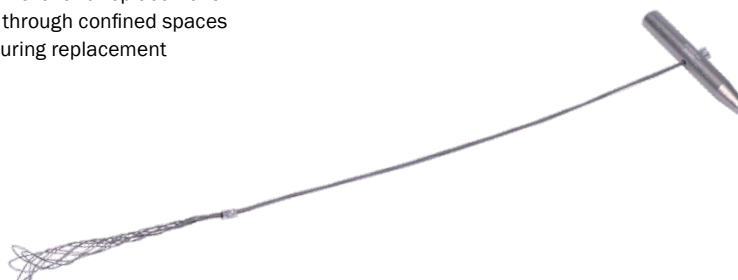

## PROTECTIVE & ANTI-SLIP FILM

- Anti-slip tape provides a non-slip surface for components where grip is essential
- Ideal for brake and clutch levers and luggage resting points
- Protection film provides a non-slip and protective surface
- Ideal for side of fuel tank and luggage resting points
- Adhesive back will stick to most surfaces
- Quick and easy to apply
- Supplied with applicator (BS1033 only)



BS1035/BS1036



BS1033


| Part No. | Description              | Size                       | Colour |
|----------|--------------------------|----------------------------|--------|
| BS1035   | Anti-Slip Film – Roll    | 10 x 3000mm                | Black  |
| BS1036   | Anti-Slip Film – Roll    | 25 x 3000mm                | Black  |
| BS1032   | Anti-Slip Film – Sheets  | 200 x 300mm (4 Qty)        | Black  |
| BS1033   | Protective Film – Sheets | 200 x 300 x 0.35mm (4 Qty) | Clear  |

## RETRACTABLE RATCHET TIE-DOWNS 2PC

- No more knots, tangles or messy straps
- Innovative retractable mechanism winds up strap after use for tidy storage
- Robust all metal construction with anti-slip ratchet grip provides superior strength and ensures long service life
- Ideal for securing motorcycles, ATVs and jet skis etc. during storage or transportation
- Available in a range of lengths: 1.2 – 4.5 metres
- BS80019 are fixed type which require mounting to trailer
- All sets conform to standard AS/NZS 4380:2001
- Supplied as twin packs



BS80032

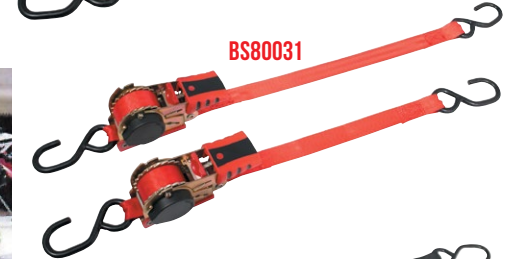

BS80031



BS80034



BS80019


| Part No. | Strap Width mm / in | Strap Length m / ft | Lashing Cap. kgs / lbs | Breaking Cap. kgs / lbs |
|----------|---------------------|---------------------|------------------------|-------------------------|
| BS80032  | 25 / 1              | 1.8 / 6             | 227 / 500              | 680 / 1500              |
| BS80031  | 25 / 1              | 2.4 / 8             | 227 / 500              | 680 / 1500              |
| BS80034  | 25 / 1              | 4.5 / 15            | 227 / 500              | 680 / 1500              |
| BS80019* | 47 / 1 7/8          | 1.2 / 4             | 250 / 550              | 1360 / 3000             |

\*Requires mounting to trailer

**BS9500**

## WATERPROOF WORKING APRON

- Heavy duty working apron designed especially for motorcycle repair and detailing
- Premium material is waterproof and grease/oil resistant
- Double layered with inbuilt stitching – outer layer resists tearing, inner layer provides waterproofing and grease/oil resistance
- Features overall type adjustable shoulder straps eliminating stress to neck
- Includes 9 pockets for tools, pens and notes
- Ensures clothes stay dry and away from chemicals while you are working

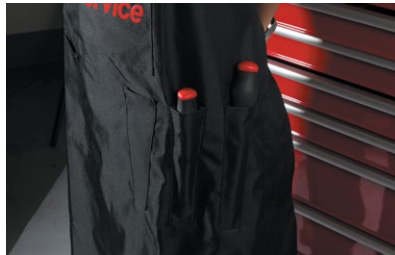

**BS80057**

## 3-IN-1 VERSATILITY EVA WORKING MAT

- Versatile working mat suitable for a wide range of applications including motorcycle and automotive repair work
- 3-in-1 adjustability for sitting, kneeling and lying down
- Made from durable 30mm thick EVA foam for comfort and support
- Provides a temperature, water and oil resistant working surface
- Folds for convenient storage
- Dimensions: 420 x 200 x 180mm (in 'sit' configuration)
- Overall length: 1200mm (in 'Lie down' configuration)



**BS6100**

## PORTABLE WORK STOOL

- Heavy duty, rotating wheels rated to carry loads up to 150kg
- Durable plastic tray carries and stores tools, parts, nuts, bolts and screws during motorcycle service work
- Quick and stable movement reduces the need for bending and crouching
- Dimensions: 290mm (h) x 320mm (w) x 450mm (l)
- Load capacity: 150kg





## MAGNETIC PARTS TRAYS

- Useful storage trays with strong in-built magnets
- Ideal for storing and holding small parts, nuts, bolts and screws neatly and securely during dismantle and reassembly
- Strong magnets attach to all metal surfaces including hoists, scissor lifts and steel workbenches, even upside down!
- Great time saver, handy on the spot storage option



| Part No.      | Shape       | Size mm (L x W x D) |
|---------------|-------------|---------------------|
| <b>BS9401</b> | Round       | 150 x 150 x 30      |
| <b>BS9404</b> | Rectangular | 240 x 140 x 30      |

## HAND TOOLS | HOSE TOOLS

**BS2008**

### FLEXIBLE HOSE CLAMP NUT DRIVER

- Flexible shaft allows easy access to awkward locations during removal and installation of hose clamps
- Comfortable grip, high torque handle
- Hollow drive handle stores sockets and bits
- Contains: 4, 6 and 8mm sockets, 4mm Flat head bit and Phillips #2 bit
- Length: 300mm



**BS2904**

### DOUBLE EAR HOSE CLAMP PLIER

- Precision cutting edges for cutting, twisting or crimping
- Specially designed for use with double ear hose clamps
- Manufactured from drop forged alloy steel for superior strength and durability
- Suitable for side and top join applications
- Jaw opening: 0-23mm (top) 1-19mm (side)
- Jaw width: 18mm (top) 8mm (side)
- Length: 220mm



## BS2110

### VACUUM HOSE REMOVAL PLIER

- Designed to remove stubborn fuel or vacuum hoses promptly and safely without damaging components
- Features sharpened "V" jaw for secure grip and spring return for easy operation
- Place the black jaw on the tubing or fitting, the sharp jaw will grip the material
- Squeeze the silver jaw to push the vacuum hoses or fuel lines off the tubing or fitting
- Manufactured from chrome treated alloy steel
- Suits: 4-13mm hose



## BS3356

### CLIC-R TYPE HOSE CLAMP PLIER

- Spring loaded pliers for hose clamp installation and removal
- Suitable for CLIC, CLIC-R and Tridon SL series hose clamps
- Specially designed jaw allows a quick change from installation to removal
- Ergonomic moulded handles provide improved grip and comfort
- Manufactured from chrome treated alloy steel
- Ideal for clamps as used on BMW and by European manufacturers
- Length: 170mm
- Jaw opening: 45mm (max.)



## BS9035

### RUBBER LINE CLAMP SET 2PC

- Compact and simple hose clamps set
- Clamps hoses without damage
- Simple wing-nut operation
- Ideal for fuel, vacuum, brake and clutch lines
- 2 piece set
- Jaw capacity: 20mm (max.)



### HOSE CLAMP PLIERS

- Crimps hose during repairs and maintenance
- Features specially designed rounded jaws to provide a damage free secure grip
- Ring lock to hold the plier in the selected position
- Manufactured from light weight strong durable plastic
- Ideal for brake, clutch, vacuum and cooling hoses



| Part No.      | Size Capacity | Length mm |
|---------------|---------------|-----------|
| <b>BS9036</b> | 3-12mm        | 150       |
| <b>BS9037</b> | 3.5-18mm      | 185       |
| <b>BS9041</b> | 4-28mm        | 255       |



## HEX KEY SETS 9PC

- 9 piece angled hex key sets available in standard or long shaft design
- Ball end allows improved access to application and up to 25° working angle for increased speed and ease of entry
- Made from chrome vanadium steel with polished chrome plated finish
- Standard length set features inbuilt magnets
- Long shaft set supplied with magnetiser
- Supplied in a hinged storage holder



| Part No.      | Description         |
|---------------|---------------------|
| <b>BS9102</b> | Hex Key Set Std 9pc |
| Size          | Shaft Length        |
| 1.5mm         | 45mm                |
| 2mm           | 50mm                |
| 2.5mm         | 55mm                |
| 3mm           | 60mm                |
| 4mm           | 70mm                |
| 5mm           | 80mm                |
| 6mm           | 90mm                |
| 8mm           | 100mm               |
| 10mm          | 110mm               |

| Part No.      | Description          |
|---------------|----------------------|
| <b>BS9103</b> | Hex Key Set Long 9pc |
| Size          | Shaft Length         |
| 1.5mm         | 90mm                 |
| 2mm           | 100mm                |
| 2.5mm         | 110mm                |
| 3mm           | 125mm                |
| 4mm           | 140mm                |
| 5mm           | 160mm                |
| 6mm           | 175mm                |
| 8mm           | 195mm                |
| 10mm          | 215mm                |

## TX-STAR KEY SETS 9PC

- 9 piece angled TX-Star key sets available in standard or long shaft design
- Made from chrome vanadium steel with polished chrome plated finish
- Standard length set features inbuilt magnets
- Long shaft set supplied with magnetiser
- Short end of key is designed for tamper proof fasteners (BS6300 only)



| Part No.      | Description             |
|---------------|-------------------------|
| <b>BS6300</b> | TX-Star Key Set Std 9pc |
| Size          | Length                  |
| T10           | 45mm                    |
| T15           | 50mm                    |
| T20           | 55mm                    |
| T25           | 65mm                    |
| T27           | 70mm                    |
| T30           | 80mm                    |
| T40           | 90mm                    |
| T45           | 100mm                   |
| T50           | 125mm                   |

| Part No.      | Description              |
|---------------|--------------------------|
| <b>BS9101</b> | TX-Star Key Set Long 9pc |
| Size          | Length                   |
| T10           | 90mm                     |
| T15           | 100mm                    |
| T20           | 110mm                    |
| T25           | 125mm                    |
| T27           | 140mm                    |
| T30           | 160mm                    |
| T40           | 175mm                    |
| T45           | 195mm                    |
| T50           | 215mm                    |

## HAND DRIVE BIT SETS 10PC

- Drive bits are essential for motorcycle work
- High quality heat treated S2 steel bits
- Palm size 1/4" high torque ratchet wrench is ideal for confined spaces
- All sets supplied in a compact and durable storage case (50 x 115mm)
- Four styles available: Flat & Phillips, Hex, 5 Point, TX-Star (Torx)



| Part No.      | Description     | Sizes                                       |
|---------------|-----------------|---|
| <b>BS6005</b> | Flat & Phillips | 3, 4, 4.5, 5.5, 6.5mm & PH0, PH1, PH2, PH3  |
| <b>BS6006</b> | Hex Bit Set     | 1.5, 2, 2.5, 3, 4, 5, 6, 7, 8mm             |
| <b>BS6007</b> | 5 Point Bit Set | T10, T15, T20, T25, T27, T30, T40, T45, T50 |
| <b>BS9729</b> | TX-Star Bit Set | T8, T10, T15, T20, T25, T27, T30, T40, T45  |

# HAND TOOLS | PICKS, BRUSHES & SCRAPERS

## PICK & HOOK SETS 4PC

- Durable soft grip pick and hook set ideal for removal of o-rings, seals and bushes in various mechanical applications
- Contains straight, 45 and 90 degree picks plus hook tool
- Stainless steel construction
- Ergonomic soft grip handles
- Available in standard and long shaft sets




| Part No.      | Description                | Shaft Length mm | Overall Length mm |
|---------------|----------------------------|-----------------|-------------------|
| <b>BS1234</b> | Pick & Hook Set 4pc - Std  | 76              | 162               |
| <b>BS0230</b> | Pick & Hook Set 4pc - Long | 152             | 214               |

**BS1235**

## SEAL PICK SET 2PC


- Quick and easy removal of o-rings and grease oil seals
- Special angled head provides easier access for removal than traditional tools
- Two piece set includes sizes 170mm and 150mm in length
- Ergonomic T-handle grip

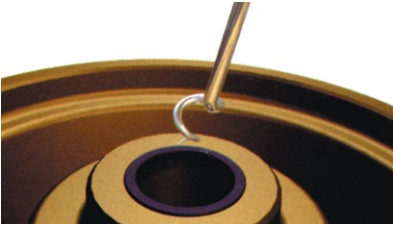

**BS1130**

## BRUSH SET 3PC

- Multi-purpose brush set consisting of nylon, brass and stainless steel brushes
- Ideal for removing dirt, grime, rust, paint and gaskets
- Ergonomic hardened plastic handle
- 3 piece set
- Brush types: nylon, brass and stainless steel
- Brush handle overall length: 180mm (7")

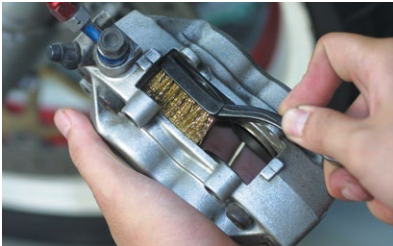

## REINFORCED PLASTIC SCRAPERS

- Multi-function tools designed for general scraping jobs
- Ideal for removal of badges, gaskets, stripes and decals
- Eliminates the potential for damage to the surface of soft metals and paintwork
- Durable ergonomic handle suitable for striking where extra force is required



| Part No.      | Description                     | Width mm | Length      |
|---------------|---------------------------------|----------|-------------|
| <b>BS2260</b> | Reinforced Plastic Scraper 15mm | 15       | 280mm (11") |
| <b>BS2261</b> | Reinforced Plastic Scraper 30mm | 30       |             |
| <b>BS2262</b> | Reinforced Plastic Scraper 50mm | 50       |             |

**BS6050**

## HANDY PANEL REMOVAL TOOL

- Specially designed extra slim profile and unique shape for the delicate task of removing small or fine fascia trim and bezels
- Impact resistant high quality nylon prevents scratching to metal and paint surfaces
- Great for removing trim clips on fairings
- Length: 200mm



**BS6502**

## PRESSURE ADJUSTING POWER CLAMP

- Flexible jaw spring clamp manufactured from high strength plastic
- Plastic clamp avoids damage to aluminium, plastic and lacquered components
- Designed to grip flat or odd shaped surfaces
- Ergonomic handles for comfort and ease of operation
- Lightweight, holds object without force concentration
- Clamping range: 0-53mm (2")



**BS9314**

## STAINLESS SCISSORS

- Suitable for cutting cables, hoses, pipes and thin metal sheet
- Hardened stainless steel blades
- Angle ground blade reduces slip when cutting
- Ergonomic grip handle
- Spring loaded operation



**BS9621**

## SCREWDRIVER SET – STUBBY 4PC

- Stubby size allows access in confined spaces
- Ideal for motorcycle fairings and cooling hoses
- Manufactured from alloy steel with easy grip handle
- 4 piece set includes 2 x Phillips head bits and 2 x flat head bits
- Phillips bits: PH1, PH2
- Flat head bits: 5, 6mm



**BS9651**

## IMPACT SCREWDRIVER SET

- Impact drive handle loosens rusted or seized screws, nuts and bolts with ease
- Reversible operation allows for secure removal and tightening
- 8 piece set includes impact handle, 4 x Phillips bits and 3 x flat head bits
- Knurled grip handle
- Suitable for both left and right handed threads
- Phillips bits: PH1, PH2, PH3, PH4
- Flat head bits: 8, 10, 12mm



**BS5420**

## TELESCOPIC RATCHET WRENCH 1/2"

- Heavy duty 36 tooth reversible ratchet with robust outer casing
- Telescopic handle extends to increase overall length by 150mm providing additional leverage
- Ideal for axle nuts or where additional leverage is required
- Manufactured from chrome vanadium steel for strength and durability
- 1/2" square drive
- Overall length: 340mm, extended: 490mm



## QUICK RELEASE RATCHETS

- 72 teeth reversible ratchet with offset handle design specific for motorcycle maintenance
- Handle features oil resistant, heavy duty coating which provides heat insulation and reduces potential damage to fairings if contact occurs
- Includes quick release socket removal




| Part No.      | Description         |
|---------------|---------------------|
| <b>BS7288</b> | 1/4" Sq.Dr. Ratchet |
| <b>BS7289</b> | 3/8" Sq.Dr. Ratchet |
| <b>BS7291</b> | 1/2" Sq.Dr. Ratchet |



## BS80056

### MULTI-FUNCTION RATCHET WRENCH SET

- All-in-one wrench handle designed with offset ergonomic grip and interchangeable ratchet head mechanism
- Features 6 ratchet mechanisms for 1/4", 3/8", 1/2" Sq. Drive and 1/4", 8mm and 10mm hex bits
- Includes 3 universal joints and safety lock extensions in 1/4", 3/8" and 1/2" square drive
- Ideal ratchet wrench set for all professional and DIY technicians
- Made from durable chrome vanadium steel
- Supplied in a sturdy metal case lined with oil resistant foam lining

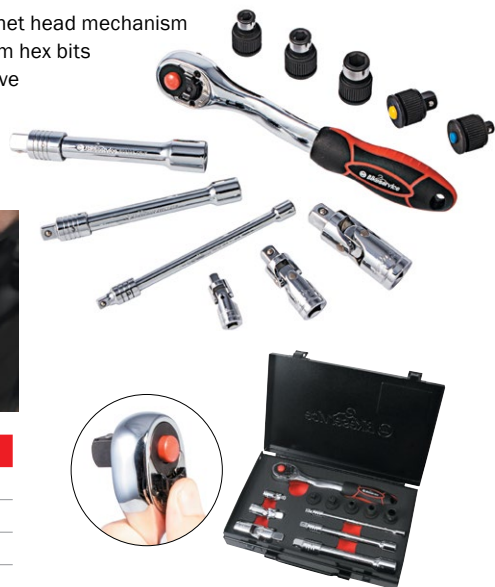

| Description        | Specification  |
|--------------------|--|
| Ratchet Handle     | 200mm long   |
| Ratchet Mechanisms | Square Drives: 1/4", 3/8" & 1/2", Hex bit adaptors: 1/4", 8 & 10mm |
| Universal Joints   | 1/4", 3/8" & 1/2"  |
| Extensions         | 1/4", 3/8" & 1/2" (150mm long)                                     |

## SOCKET SETS - METRIC

- Sockets for use on common metric fasteners found in motorcycle applications
- 6-point wall drive design grips the flats on new or worn bolts and nuts
- Manufactured from drop forged vanadium steel for maximum strength and longevity
- Supplied on sturdy plastic socket rail able to mounted or hung in tool box or tool store
- Available in 1/4", 3/8" and 1/2" square drive



| Part No.      | Description          | Style | Sizes mm                            |
|---------------|----------------------|-------|-------------------------------------|
| <b>BS9200</b> | 1/4" Socket Set 10pc | Deep  | 5, 6, 7, 8, 9, 10, 11, 12, 13 & 14  |
| <b>BS9201</b> | 3/8" Socket Set 9pc  | Deep  | 10, 11, 12, 13, 14, 15, 16, 17 & 19 |
| <b>BS9202</b> | 1/2" Socket Set 8pc  | Short | 10, 11, 12, 13, 14, 17, 19 & 21     |



## BS6012

### MULTI DRIVER SPANNER SET 8PC

- Specially designed spanner set grips fasteners on flats not corners making them universally capable
- Suitable for use on metric and SAE 6pt, 12pt, Tx-Star, Square, 30% rounded, spline and RIBE nuts
- 45° angle in bi-hex 12 point box end provides better access to confined fasteners
- 8 piece set chrome plated and polished finish
- Sizes: 6, 8, 10, 12, 13, 14, 17, 19mm



#### CONTENTS

| Part No. | Size | Qty |
|----------|------|-----|
| BS6012A  | 6mm  | 1   |
| BS6012B  | 8mm  | 1   |
| BS6012C  | 10mm | 1   |
| BS6012D  | 12mm | 1   |

| Part No. | Size | Qty |
|----------|------|-----|
| BS6012E  | 13mm | 1   |
| BS6012F  | 14mm | 1   |
| BS6012G  | 17mm | 1   |
| BS6012H  | 19mm | 1   |

## BS7525

### RATCHET WRENCH SET – REVERSIBLE METRIC 2PC

- Double-ended ring wrench set featuring reversible dual head ratchet mechanism
- Four double hex sizes in each wrench covers most popular metric fasteners used on motorcycles
- An ideal light weight (350g) addition to any motorcycle tool kit
- Manufactured from chrome vanadium steel for strength and durability
- Sizes: (1) 8, 10, 12, 13mm  
(2) 14, 17, 18, 19mm



## BS7352

### RATCHET WRENCH SET – STUBBY FLEX HEAD METRIC 8PC

- Flexible head (180°) stubby combination ring/open end design
- 8 piece set features 72 (5°) tooth ratchet head assembly
- Ideal for confined spaces where working room is limited
- Manufactured from tempered forged alloy steel with polished mirror chrome finish
- Sizes: 6, 8, 10, 12, 13, 14, 17, 19mm



## DIGITAL TORQUE WRENCHES

- Professional digital torque wrenches with LCD display
- 72 teeth reversible ratchet enables left and right hand thread capability
- Oil and impact resistant casing ensures durability and long service life
- LCD displays in Nm, ft.Lbs, in.Lbs, kgm and kg-cm
- Features automatic power off after 2 minutes of non-use to conserve battery life
- Battery operated (CR2032 - 3 volt)
- Complete with certificate of calibration traceable to national standards
- Supplied in a protective blow moulded case
- Available in 1/4", 3/8" and 1/2" square drive

User Manual



BS5421

BS5422

BS5423

| Part No. | Description                | Torque Range |          |
|----------|----------------------------|--------------|----------|
|          |                            | Nm           | Lbf. ft. |
| BS5421   | 1/4" Digital Torque Wrench | 10-50        | 7-35     |
| BS5422   | 3/8" Digital Torque Wrench | 20-100       | 15-80    |
| BS5423   | 1/2" Digital Torque Wrench | 40-200       | 30-150   |

BS7356



## TORQUE ANGLE GAUGE

- Measures angle of rotation after pre-torque load in torque to yield applications
- 360° scale clearly marked in 2 degree increments and in intervals of 10 and 30
- Magnetic flexible supporting shaft holds the gauge leaving hands free during operation
- 1/2" square drive



## STUD REMOVER & INSTALLER TOOL SETS

- Easily removes and installs studs without damage to threads
- Each set supplied with remover and installer
- Suitable for most popular stud thread sizes

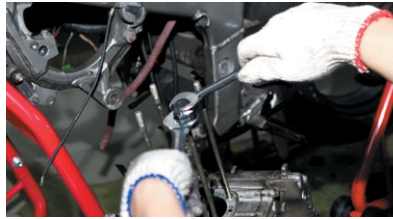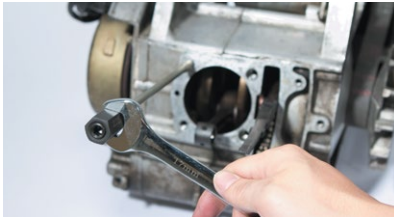

| Part No.      | Description                    | Thread     | Contents |           |
|---------------|--------------------------------|------------|----------|-----------|
|               |                                |            | Remover  | Installer |
| <b>BS2311</b> | Stud Remover/Installer Set 2pc | M6 x 1.0   | BS2311A  | BS2311B   |
| <b>BS2312</b> | Stud Remover/Installer Set 2pc | M8 x 1.25  | BS2312A  | BS2312B   |
| <b>BS2313</b> | Stud Remover/Installer Set 2pc | M10 x 1.25 | BS2313A  | BS2313B   |
| <b>BS2314</b> | Stud Remover/Installer Set 2pc | M10 x 1.5  | BS2314A  | BS2314B   |

# HAND TOOLS | T-HANDLES

**BS80040**

## QUICK SWIVEL T-HANDLE

- Speed brace style T-handle enables fast fit or removal of fasteners
- Innovative floating shaft handle features adjustment to 3 positions and allows independent rotation of T-handle
- Anti-slip coated handle provides positive grip even in greasy conditions
- 3/8" square drive
- Length: 300mm



## T-HANDLE SOCKET WRENCHES

- 8 piece T-handle socket wrench sets featuring 6-point (Hex) deep socket design
- Eliminates the need for ratchet, extension and socket enabling quick removal and fitment of motorcycle fasteners
- Manufactured from drop forged, heat treated chrome vanadium steel with carbon steel handle
- Each set includes a wrench stand for ease of tool selection and storage
- Available in 140mm and 300mm shaft length
- Supplied with 8 T-handle speed rings which allow the shaft to rotate and spin freely (BS1710A only)
- Style: 6 point deep socket
- Sizes: 6, 8, 10, 12, 13, 14, 17 & 19mm
- Also sold individually



| Part No.      | Description                             |
|---------------|---|
| <b>BS1711</b> | <b>T-Handle Socket Wrench Set 140mm</b> |
| Contents      |   |
| Part No.      | Size mm                                 |
| <b>BS1671</b> | 6                                       |
| <b>BS1672</b> | 8                                       |
| <b>BS1673</b> | 10                                      |
| <b>BS1674</b> | 12                                      |
| <b>BS1675</b> | 13                                      |
| <b>BS1676</b> | 14                                      |
| <b>BS1677</b> | 17                                      |
| <b>BS1678</b> | 19                                      |

| Part No.      | Description                             |
|---------------|---|
| <b>BS1710</b> | <b>T-Handle Socket Wrench Set 300mm</b> |
| Contents      |   |
| Part No.      | Size mm                                 |
| <b>BS1661</b> | 6                                       |
| <b>BS1662</b> | 8                                       |
| <b>BS1663</b> | 10                                      |
| <b>BS1664</b> | 12                                      |
| <b>BS1665</b> | 13                                      |
| <b>BS1666</b> | 14                                      |
| <b>BS1667</b> | 17                                      |
| <b>BS1668</b> | 19                                      |

| Part No.       | Description  |
|----------------|--|
| <b>BS1710A</b> | <b>T-Handle Socket Wrench SPEED RING Set 300mm</b> |
| Contents       |  |
| Part No.       | Size mm  |
| <b>BS1671A</b> | 6  |
| <b>BS1672A</b> | 8  |
| <b>BS1673A</b> | 10   |
| <b>BS1674A</b> | 12   |
| <b>BS1675A</b> | 13   |
| <b>BS1676A</b> | 14   |
| <b>BS1677A</b> | 17   |
| <b>BS1678A</b> | 19   |

## BS1700

### T-HANDLE SPEED RING SET 4PC

- Assists T-Handle socket alignment and allows the T-Handle shaft to rotate freely during removal and fitment of fasteners
- Increases the speed of T-handle socket use and eliminates friction between the metal shaft and the operators hand during rotation
- 4 piece set conveniently locks and stores on the tool after use
- Suitable for 300mm T-Handles
- Length: 80mm
- Internal diameter: 12.7mm (1/2")



### UNIVERSAL JOINT T-HANDLE WRENCHES

- Long reach T-handles with universal joint drive ideal for accessing confined fasteners
- Sliding beam handle can be set in three positions for added leverage
- Manufactured from chrome vanadium steel for strength and durability
- Available in 1/4, 3/8 and 1/2" square drive

| Part No. | Sq. Drive | Length mm |
|----------|-----------|-----------|
| BS80018  | 1/4"      | 375       |
| BS80017  | 3/8"      | 420       |
| BS80016  | 1/2"      | 500       |



### T-HANDLE HEX WRENCHES

- For the removal and installation of 6-point (Hex) style screws, bolts and fittings
- Hex key fittings on each point of the tool (3 in total) for quick and easy operation
- T-Handle design with sliding beam handle can be set in three positions for added leverage
- Manufactured from heat treated chrome vanadium steel
- Sold individually

| Part No.    | Hex Size mm | Length mm |
|-------------|-------------|-----------|
| BSG01685-03 | 3           | 125       |
| BSG01685-05 | 4           | 180       |
| BSG01685-07 | 5           | 180       |
| BSG01685-08 | 6           | 210       |
| BSG01685-10 | 8           | 250       |
| BSG01685-11 | 10          | 300       |
| BSG01685-12 | 12          | 320       |
| BSG01685-13 | 14          | 340       |



## T-HANDLE TORX WRENCHES

- For the removal and installation of Torx style screws, bolts and fittings
- Torx key fittings on each point of the tool (3 in total) for quick and easy operation
- T-Handle design with sliding beam handle can be set in three positions for added leverage
- Manufactured from heat treated chrome vanadium steel
- Sold individually

| Part No.           | Torx Size mm | Length mm |
|--------------------|--------------|-----------|
| <b>BSG01686-05</b> | T25          | 180       |
| <b>BSG01686-06</b> | T27          | 180       |
| <b>BSG01686-07</b> | T30          | 180       |
| <b>BSG01686-08</b> | T40          | 210       |
| <b>BSG01686-09</b> | T45          | 210       |
| <b>BSG01686-10</b> | T50          | 210       |




# HAND TOOLS | TOOL KITS

**BS9728**

## PERSONAL TOOL PACK 26PC

- Convenient tool carrying pack designed for motorcycles
- Velcro pouch organises and protects your tools plus strap enables the pouch to attach to motorcycle
- 26 piece set contains 1/4" square drive ratchet and a selection of multi driver sockets and drive bits
- Fits metric and SAE 6 point, 12 point, TX-Star, square, 30% round off, spline and ribe nuts

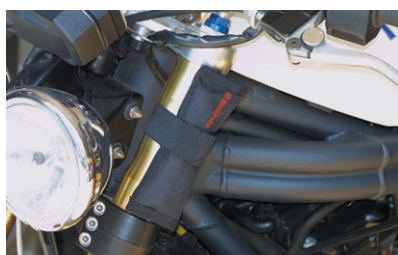

### CONTENTS

| Description               | Size   |
|---------------------------|--|
| Ratchet Handle            | 1/4" Sq.Dr.  |
| Multi Driver Sockets      | Square Drives: 1/4", 3/8" & 1/2", Hex bit adaptors: 1/4", 8 & 10mm |
| 7piece                    | 1/4" Sq.Dr. x 1/4" Hex Adaptor                                     |
| 4, 6, 8, 10, 12, 13, 14mm | 1/4", 3/8" & 1/2" (150mm long)                                     |
| Extension Bar             | 1/4" Sq.Dr. 70mm   |
| Hex Bits                  | 2, 2.5, 3, 4, 5, 6, 7, 8mm   |
| Flat Bits                 | 3, 4, 5.5, 6.5mm   |
| Phillips Bits             | PH0, PH1, PH2, PH3   |

**BS9725**

## PERSONAL TOOL PACK 34PC

- Convenient tool carrying pack designed for metric motorcycles
- Velcro pouch organises and protects your tools
- 34 piece set contains a selection of hex sockets, drive bits, open-end wrenches and pliers
- Fits metric and SAE 6 point, 12 point, TX-Star, square, 30% round off, spline and ribe nuts
- Suits metric motorcycles



### CONTENTS

| Description                  | Size  |
|------------------------------|---|
| T-Bar                        | 3/8" Sq. dr. T-bar and length 250mm 3/8" Sq. Dr. quick release plus lock type extension bar |
| Multi Driver Sockets 7 piece | 8, 10, 12, 13, 14, 17, 19mm 3/8" Sq. Dr. x 1/4" Hex adaptor tool holder                     |
| Open End Wrenches 3 piece    | 8 x 10mm, 12 x 13mm, 14 x 17mm  |
| Hex Bits                     | 2.5, 3, 4, 5, 6, and 8mm  |
| Flat Bits                    | 4, 4.5, 5.5 and 6.5mm   |
| Phillips Bits                | PH1, PH2 and PH3  |
| TX-star Bit                  | TX10, TX15, TX20, TX25, TX27, TX30, TX40  |
| Pliers                       | Long nose 150mm   |

BS9839

## MASTER MECHANICS TOOL KIT 110PC

- A comprehensive tool set with all tools and tool sizes specially selected for motorcycle service and maintenance, no excess tools or sizes included
- 110 piece set includes a comprehensive selection of quality Bikeservice screwdrivers, key sets, ratchets, sockets and bit sets
- Ideal for motorcycle technicians, apprentices and DIY enthusiasts
- Tool box size (mm): 440 (W) x 240 (D) x 230 (H)
- Weight: 15kgs (includes tools)



### CONTENTS

| Description                             | Qty | Size   |
|---|-----|--|
| Ratchet Handles                         | 3   | 1/4", 3/8" & 1/2" Sq. Dr.  |
| 1/4" Drive Short Sockets                | 11  | 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm                                 |
| 1/4" Drive Deep Sockets                 | 10  | 5, 6, 7, 8, 9, 10, 11, 12, 13, 14mm                                    |
| 3/8" Drive Short Sockets                | 14  | 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21mm                 |
| 3/8" Drive Deep Sockets                 | 10  | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19mm                               |
| 1/2" Drive Short Sockets                | 16  | 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 24, 27, 30, 32mm   |
| 3/8" Drive Thin Wall Spark Plug Sockets | 4   | 14, 16, 18, 21mm   |
| 1/4" Drive Hex Bit Sockets 5pc          | 5   | 2.5, 3, 4, 5 & 6mm   |
| 1/4" Drive TX-Star Bit Sockets          | 6   | T10, T15, T20, T25, T27, T30   |
| 1/4" Drive Phillips Bit Socket          | 1   | PH3  |
| 3/8" Drive Hex Bit Sockets              | 2   | 7, 8, 10mm   |
| 3/8" Drive TX-Star Bit Sockets          | 3   | T40, T45, T50  |
| Lock Type Extension Bars                | 6   | 1/4"x150mm, 3/8"x100mm, 3/8"x150mm, 3/8"x250mm, 1/2"x150mm, 1/2"x250mm |
| Square Drive Adaptors                   | 3   | 1/2" F x 3/8" M, 3/8" F x 1/4" M, 1/4" Dr x 1/4" Hex                   |
| Universal Joints                        | 3   | 1/4", 3/8", 1/2" Sq. Dr.   |
| Lock Type Drive Handle                  | 1   | 1/4" Sq. Dr.   |
| Phillips Screwdrivers                   | 2   | PH2x90mm, PH2x210mm  |
| Flat Blade Screwdrivers                 | 2   | 6.5x90mm, 6.5x210mm  |
| Hex Key Wrenches                        | 5   | 1.5, 2, 2.5, 3, 4mm  |
| 45° Combination Wrenches                | 5   | 6, 8, 10, 12, 14mm   |
| Miniature Magnetiser                    | 1   | -  |



| Product                                      | Page      |
|--|-----------|
| <b>A</b>                                     |           |
| Acid Filler                                  | 33        |
| Adjusting Tool Set, Carburetor               | 9         |
| Alignment Tools - Axle                       | 16        |
| Allen Key Sets                               | 41        |
| Alternator Cover Puller - Ducati             | 3         |
| Anti Slip Film                               | 37        |
| Apron  | 38        |
| Axle Alignment Tools                         | 16        |
| Axle Nut Sockets                             | 32        |
| <b>B</b>                                     |           |
| Battery Acid Filler                          | 33        |
| Battery Terminal Cleaning Tool Kit           | 33        |
| Bearing & Seal Retaining Tools               | 22        |
| Bearing Installer Tool Kit - Steering Tube   | 20-21, 25 |
| Bearing Outer Race Removal Tool              | 20        |
| Bearing Packer                               | 25        |
| Belt Tension Gauge                           | 26        |
| Bit Sets                                     | 17, 42    |
| Bit Socket Sets - Front Fork                 | 17        |
| BMW Spark Coil Removal Tool                  | 35        |
| Brake Bleeder & Vacuum Pump                  | 24        |
| Brake Pad Spreader                           | 24        |
| Brake Piston Detaching Tool                  | 23        |
| Brake Spring Hook & Headlight                | 23        |
| Breaking & Riveting Tool Set - Cam Chain     | 4         |
| Breaking & Riveting Tools - Drive Chain      | 26-27     |
| Brush Set                                    | 43        |
| Brush Wheel Cleaning                         | 30        |
| Bush Drive Sets                              | 25        |
| <b>C</b>                                     |           |
| Cable Wire Lubrication Tool                  | 36        |
| Cam Chain Breaker & Riveting Tool Set        | 4         |
| Cap Tools Fork                               | 17-18     |
| Carburetor Adjusting Tool Set                | 9         |
| Carburetor Synchroniser Vacuum Gauge Set     | 9         |
| Chain Adjusting C-Hook Wrench                | 16        |
| Chain Breaking & Riveting Tool - Drive Chain | 26-27     |
| Chain Breaking & Riveting Tool - Cam Chain   | 4         |
| Chain Extractor                              | 26        |
| Chain Link Pliers                            | 27        |
| Chain Tensioner                              | 27        |
| C-Hook Wrenches                              | 16        |
| Clamp - Pressure                             | 44        |
| Cleaning Tool Kit - Terminal                 | 33        |
| Clic-R Clamp Pliers                          | 40        |
| Clutch Hub & Counter Balancer Sockets        | 10        |
| Clutch Hub Spanner                           | 11-12     |
| Clutch Nut Wrenches                          | 11        |
| Clutch Outer Holding Wrench                  | 11-12     |
| Clutch Spring Compressor - Harley            | 12        |
| Coil Plug Removers                           | 35        |
| Coil Spring Compression Tool - Hydraulic     | 19        |

| Product                                     | Page      |
|---|-----------|
| Compression Test Kit - Cylinder             | 2         |
| Compressor - Clutch Spring                  | 12        |
| Compressor - Coil Spring                    | 19        |
| Compressor - Valve Spring                   | 5         |
| Compressor Set - Piston Ring                | 3         |
| Cooling System & Radiator Pressure Test Set | 6         |
| Counter Balancer & Clutch Hub Sockets       | 10        |
| Crankcase Separator Tool Set                | 3         |
| Crankshaft Turning Tool - Ducati            | 4         |
| Cutters - Grip End                          | 20        |
| Cylinder Compression Test Kit               | 2         |
| Cylinder Leak Down Test Kit                 | 2         |
| <b>D</b>                                    |           |
| Disc Pad Brake Spreader                     | 24        |
| Double Ear Hose Clamp Pliers                | 39        |
| Drain Can - Portable, Oil                   | 7         |
| Drive Belt Tension Gauge                    | 26        |
| Drive Chain Tensioner                       | 27        |
| Ducati Alternator Cover Puller              | 3         |
| Ducati Axle Align Tools                     | 16        |
| Ducati Crankshaft Turning Tool              | 4         |
| Ducati Steering Stem Nut Tool               | 22        |
| Dust Seal Drivers - Front Fork              | 16        |
| Engine Case Separator Tool Set              | 3         |
| Extractor Bar - Tyre Valve                  | 28        |
| <b>F</b>                                    |           |
| Feeler Gauges                               | 5         |
| Film - Anti Slip                            | 37        |
| Flexible Hose Clamp Nut Driver              | 39        |
| Flexible Spout Funnel                       | 7         |
| Flywheel Pullers                            | 13-15     |
| Fork Cap Tools                              | 17-18, 21 |
| Fork Oil Level Gauge                        | 19        |
| Fork Seal Drivers                           | 16        |
| Fork Wrenches                               | 18        |
| Front Fork Adjusting Wrenches               | 18        |
| Front Fork Bit Sockets                      | 17        |
| Front Fork Dust Seal Drivers                | 16        |
| Front Fork Vice                             | 19        |
| Front Wheel Bearing Removal Tool Set        | 25        |
| Front Wheel Spindle Removal Tool            | 32        |
| Funnel - Flexible Spout                     | 7         |
| <b>G</b>                                    |           |
| Gauge - Belt Tension                        | 26        |
| Gauge - Carburetor Synchroniser Vacuum      | 9         |
| Gauge - Feeler                              | 5         |
| Gauge - Fork Oil Level                      | 19        |
| Gauge - Torque Angle                        | 48        |
| Gauges - Tyre Pressure                      | 29-30     |
| Gauges - Tyre Tread Depth                   | 29        |
| Grip End Cutter                             | 20        |

| Product                             | Page  |
|-------------------------------------|-------|
| <b>H</b>                            |       |
| Hand Drive Bit Sets                 | 42    |
| Handle Bar Grip Cutter              | 20    |
| Harley Clutch Spring Compressor     | 12    |
| Headlight & Brake Spring Hook       | 23    |
| Heat Shrink Tube Sets               | 34    |
| Hex Key Sets                        | 41-42 |
| Hex T-Handle Wrenches               | 51    |
| Hose Clamp Nut Driver - Flexible    | 39    |
| Hose Clamp Pliers                   | 39-40 |
| Hose Pliers                         | 39-40 |
| Hydraulic Coil Spring Compressor    | 19    |
| <b>I</b>                            |       |
| Impact Screwdriver                  | 45    |
| Internal Axle Nut Hex Sockets       | 32    |
| <b>K</b>                            |       |
| Key Sets                            | 41-42 |
| Key Sets - Hex                      | 41-42 |
| Key Sets - Torx                     | 41-42 |
| KYB Fork Tools                      | 17    |
| <b>L</b>                            |       |
| Leakdown Test Kit                   | 2     |
| Levers - Tyre                       | 29    |
| Lock Nut Sockets                    | 32    |
| <b>M</b>                            |       |
| Magnetic Hex Key Set                | 41    |
| Magnetic Parts Trays                | 39    |
| Magnetic TX-Star Key Set            | 41    |
| Magneto Flywheel Pullers            | 13-15 |
| Magneto Flywheel Puller, 6 in 1     | 13    |
| Master Mechanics Tool Kit           | 54    |
| Multi Driver Spanners               | 47    |
| Multi Function Ratchet Wrench Set   | 46    |
| <b>O</b>                            |       |
| Oil Drain Can                       | 7     |
| Oil Filter Cup Wrench               | 8     |
| Oil Filter Wrench, Universal, 3-Leg | 7     |
| Oil Level Gauge - Fork              | 19    |
| Oxygen Sensor Sockets               | 9     |
| <b>P</b>                            |       |
| Packer Bearing                      | 25    |
| Panel Removal Tool                  | 44    |
| Parts Trays - Magnetic              | 39    |
| Pick & Hook Sets                    | 42-43 |
| Piston Locating Tools               | 4     |
| Piston Ring Compressor Set          | 3     |
| Piston Ring Pliers                  | 3     |
| Plastic Scrapers                    | 43    |
| Pliers - Piston Ring                | 3     |

| Product                                 | Page  |
|---|-------|
| Pliers - Vacuum Hose Removal            | 40    |
| Portable Oil Drain Can                  | 7     |
| Portable Work Stool                     | 38    |
| Pressure Adjusting Power Clamp          | 44    |
| Pressure Clamp                          | 44    |
| Protection Film                         | 37    |
| Puller - Ducati Alternator Cover        | 3     |
| Pullers - Flywheel                      | 13-15 |
| Pullers - Magneto Flywheel              | 13-15 |
| Pullers - Magneto Flywheel, 6 in 1      | 13    |
| Pulley & Clutch Lock Nut Wrench         | 12    |
| Pulley & Clutch Locking Wrenches        | 11-12 |
| Pulley Holder Wrench Set - Universal    | 11    |
| Pulley Nut Wrench - Dual End            | 11    |
| <b>Q</b>                                |       |
| Quick Swivel T-Handle                   | 49    |
| <b>R</b>                                |       |
| Radiator Tester                         | 6     |
| Ratchet Set                             | 46    |
| Ratchet Straps - Retractable            | 37    |
| Ratchet Wrench Set - Stubby             | 47    |
| Ratchets Handles                        | 46    |
| Repair Kit - Drive Chain                | 26    |
| Retractable Ratchet Tie Downs           | 37    |
| Reversible Ratchet Wrench Set           | 47    |
| Rim Protector Set                       | 29    |
| <b>S</b>                                |       |
| Scissors - Stainless Steel              | 44    |
| Scrapers - Plastic                      | 43    |
| Screwdriver Set - Stubby                | 45    |
| Screwdrivers                            | 45    |
| Seal & Bearing Retaining Tools          | 22    |
| Seal Pick Set                           | 43    |
| Sealing Ring Assembly Tool Set          | 23    |
| Separator Set - Crankcase               | 3     |
| Socket Sets                             | 46    |
| Sockets - Counter Balancer & Clutch Hub | 10    |
| Sockets - Oxygen Sensor                 | 9     |
| Sockets - Spark Plug                    | 35    |
| Sockets - T-Handle                      | 50    |
| Sockets - Vacuum Switch                 | 9     |
| Spanner - Oil Filter & Clutch Hub       | 7     |
| Spanners - Multi Driver                 | 47    |
| Spark Plug Maintenance Kit              | 35    |
| Spark Plug Coil Removers                | 35    |
| Spark Plug Sockets - Extra Thin Wall    | 35    |
| Speed Handles                           | 51    |
| Spindle Removal Tool - Front Wheel      | 32    |
| Spoke Torque Wrench Set                 | 31    |
| Spring Compressor - Clutch              | 12    |
| Stainless Steel Scissors                | 44    |
| Starter Flywheel Puller                 | 10    |
| Starter Gear Nut Wrench                 | 10    |

| Product                                  | Page  |
|--|-------|
| Steering Bearing Race Remover            | 20    |
| Steering Head Bearing Installer Set      | 21    |
| Steering Stem & Front Cap Fork Wrenches  | 18    |
| Steering Stem Nut Tool Ducati            | 22    |
| Steering Tube Bearing Installer & Puller | 20-21 |
| Stripper - Wire                          | 33    |
| Stubby Ratchet Wrench Set                | 47    |
| Stubby Screwdrivers                      | 45    |
| Stud Remover and Installer               | 49    |

## T

|                                   |       |
|-----------------------------------|-------|
| T Handle Wrenches - Hex           | 51    |
| T Handle Wrenches - Torx          | 52    |
| Tachometer Cable Replacement Tool | 49    |
| Tappet Adjusting Tool Set         | 6     |
| Telescopic Ratchet Handle         | 45    |
| Tensioner Chain                   | 27    |
| Terminal Tool - Wiring Harness    | 34    |
| Tester - Cylinder Leakdown        | 2     |
| T-Handle - Quick Swivel           | 49    |
| T-Handle Sockets                  | 50    |
| T-Handles - Universal Joint       | 51    |
| Tie Downs - Retractable           | 37    |
| Timing Plug Wrench                | 4     |
| Tool Kit - Master Mechanics       | 54    |
| Tool Packs                        | 52-54 |
| Top Front Fork Nut Wrenches       | 18    |
| Torque Angle Gauge                | 48    |
| Torque Wrench Set - Spoke         | 31    |
| Torque Wrenches                   | 48    |
| Torx Key Sets                     | 41-42 |
| Torx T-Handle Wrenches            | 52    |
| Turning Tool - Ducati Crankshaft  | 4     |
| TX-Star Key Set                   | 41-42 |
| Tyre Bead Holding Tool            | 28    |
| Tyre Inflator - Digital           | 30    |
| Tyre Levers                       | 29    |
| Tyre Pressure Gauge               | 29-30 |
| Tyre Tread Depth Gauge            | 29    |
| Tyre Valve Extractor Bar          | 28    |

## U

|                                    |    |
|------------------------------------|----|
| U Hook Handle                      | 23 |
| Universal Joint T-Handles          | 51 |
| Universal Oil Filter Wrench        | 7  |
| Universal Pulley Holder Wrench Set | 11 |

## V

|   |    |
|---|----|
| Vacuum Hose Removal Pliers                    | 40 |
| Vacuum Pump & Brake Bleeder Kit               | 24 |
| Vacuum Switch Sockets                         | 9  |
| Valve Core Torque Tool                        | 27 |
| Valve Spring Collet Remover/Replacement Tools | 5  |
| Valve Spring Compressor Kit                   | 5  |
| Versatility Working Mat                       | 38 |
| Vice - Front Fork                             | 19 |

| Product | Page |
|---------|------|
|---------|------|

## W

|  |       |
|--|-------|
| Waterproof Working Apron               | 38    |
| Wheel Balancing Stand                  | 31    |
| Wheel Cleaning Brush                   | 30    |
| Wheel Lock Nut Sockets                 | 32    |
| Wire Retaining Tool                    | 36    |
| Wire Stripper - Professional           | 33    |
| Wire Terminal Tool                     | 34    |
| Work Stool - Portable                  | 38    |
| Working Apron                          | 38    |
| Working Mat                            | 38    |
| Wrench - Chain Adjusting C-Hook        | 38    |
| Wrench - C-Hook                        | 16    |
| Wrench - Clutch Outer Holding          | 11-12 |
| Wrench - Oil Filter, Universal, 3-Leg  | 7     |
| Wrench - Pulley & Clutch Lock Nut      | 11-12 |
| Wrench - Pulley Nut, Dual End          | 11    |
| Wrench - Starter Gear Nut              | 10    |
| Wrench - Timing Plug                   | 4     |
| Wrenches - Clutch Nut                  | 11-12 |
| Wrenches - Fork                        | 18    |
| Wrenches - Hex T-Handles               | 51    |
| Wrenches - Ratchet                     | 47    |
| Wrenches - Steering & Front Cap        | 18    |
| Wrenches - T Handle Socket             | 50    |
| Wrenches - Top Front Fork Nut          | 18    |
| Wrenches - Torque                      | 48    |
| Wrenches - Torx T-Handles              | 52    |
| Wrenches - Universal Pulley Holder Set | 11    |

| Part No. | Page |
|----------|------|
| BS0044   | 23   |
| BS0058   | 9    |
| BS0059   | 9    |
| BS0230   | 42   |
| BS0231   | 9    |
| BS0244   | 6    |
| BS0244A  | 6    |
| BS0244B  | 6    |
| BS0244C  | 6    |
| BS0244D  | 6    |
| BS0244E  | 6    |
| BS0244F  | 6    |
| BS0350   | 16   |
| BS0351   | 16   |
| BS0352   | 16   |
| BS0353   | 16   |
| BS1020   | 33   |
| BS1030   | 34   |
| BS1031   | 34   |
| BS1032   | 37   |
| BS1033   | 37   |
| BS1034   | 36   |
| BS1035   | 37   |
| BS1036   | 37   |
| BS1040   | 33   |
| BS1130   | 43   |
| BS1164   | 27   |
| BS1234   | 42   |
| BS1235   | 43   |
| BS12900  | 35   |
| BS12901  | 35   |
| BS1298   | 35   |
| BS1501   | 36   |
| BS1661   | 50   |
| BS1661A  | 50   |
| BS1662   | 50   |
| BS1662A  | 50   |
| BS1663   | 50   |
| BS1663A  | 50   |
| BS1664   | 50   |
| BS1664A  | 50   |
| BS1665   | 50   |
| BS1665A  | 50   |
| BS1666   | 50   |
| BS1666A  | 50   |
| BS1667   | 50   |
| BS1667A  | 50   |
| BS1668   | 50   |
| BS1668A  | 50   |
| BS1671   | 50   |
| BS1672   | 50   |
| BS1673   | 50   |
| BS1674   | 50   |
| BS1675   | 50   |
| BS1676   | 50   |
| BS1677   | 50   |
| BS1678   | 50   |

| Part No. | Page |
|----------|------|
| BS1700   | 51   |
| BS1710   | 50   |
| BS1710A  | 50   |
| BS1711   | 50   |
| BS1814   | 34   |
| BS1815   | 34   |
| BS2008   | 39   |
| BS2110   | 40   |
| BS2201   | 6    |
| BS2201A  | 6    |
| BS2201B  | 6    |
| BS2201C  | 6    |
| BS2201D  | 6    |
| BS2201E  | 6    |
| BS2201F  | 6    |
| BS2250   | 4    |
| BS2251   | 4    |
| BS2260   | 43   |
| BS2261   | 43   |
| BS2262   | 43   |
| BS2300   | 3    |
| BS2302   | 4    |
| BS23021  | 3    |
| BS23050  | 4    |
| BS2311   | 49   |
| BS2311A  | 49   |
| BS2311B  | 49   |
| BS2312   | 49   |
| BS2312A  | 49   |
| BS2312B  | 49   |
| BS2313   | 49   |
| BS2313A  | 49   |
| BS2313B  | 49   |
| BS2314   | 49   |
| BS2314A  | 49   |
| BS2314B  | 49   |
| BS2401   | 14   |
| BS2402   | 14   |
| BS2403   | 14   |
| BS2404   | 14   |
| BS2405   | 14   |
| BS2421   | 15   |
| BS2422   | 15   |
| BS2423   | 15   |
| BS2424   | 15   |
| BS2441   | 14   |
| BS2442   | 14   |
| BS2443   | 14   |
| BS2444   | 14   |
| BS2460   | 14   |
| BS2461   | 15   |
| BS2462   | 15   |
| BS2463   | 15   |
| BS2464   | 15   |
| BS2465   | 15   |
| BS2467   | 15   |
| BS2468   | 15   |

| Part No. | Page |
|----------|------|
| BS2469   | 15   |
| BS2470   | 14   |
| BS2471   | 14   |
| BS2472   | 14   |
| BS2473   | 14   |
| BS2474   | 14   |
| BS2475   | 14   |
| BS2476   | 14   |
| BS2477   | 14   |
| BS2478   | 14   |
| BS2479   | 14   |
| BS2483   | 15   |
| BS2484   | 15   |
| BS2485   | 15   |
| BS2486   | 15   |
| BS2487   | 15   |
| BS2488   | 15   |
| BS2489   | 15   |
| BS2493   | 10   |
| BS2494   | 15   |
| BS2501   | 7    |
| BS2551   | 7    |
| BS2904   | 39   |
| BS3000   | 10   |
| BS3001   | 10   |
| BS3002   | 10   |
| BS3003   | 10   |
| BS3004   | 10   |
| BS3008   | 10   |
| BS3009   | 10   |
| BS3032   | 3    |
| BS3039   | 3    |
| BS3074   | 4    |
| BS3101   | 18   |
| BS3102   | 18   |
| BS3105   | 5    |
| BS3109A  | 5    |
| BS3109B  | 5    |
| BS3112   | 11   |
| BS3211   | 29   |
| BS3212   | 30   |
| BS3238   | 30   |
| BS3356   | 40   |
| BS3500   | 26   |
| BS3506   | 27   |
| BS35101  | 26   |
| BS35105  | 26   |
| BS3550   | 4    |
| BS3699   | 28   |
| BS3701   | 28   |
| BS3913   | 13   |
| BS3949   | 27   |
| BS4000   | 18   |
| BS4001   | 18   |
| BS4002   | 18   |
| BS4003   | 18   |
| BS4004   | 18   |

| Part No. | Page |
|----------|------|
| BS4005   | 18   |
| BS4006   | 18   |
| BS4008   | 22   |
| BS4009   | 22   |
| BS4010   | 22   |
| BS4011   | 22   |
| BS4012   | 18   |
| BS4013   | 18   |
| BS4014   | 18   |
| BS4018   | 22   |
| BS4019   | 22   |
| BS4030   | 17   |
| BS4031   | 17   |
| BS4032   | 17   |
| BS4033   | 17   |
| BS4051   | 17   |
| BS4052   | 17   |
| BS4100   | 19   |
| BS4107   | 9    |
| BS4107A  | 9    |
| BS41500  | 19   |
| BS4201   | 20   |
| BS4224   | 9    |
| BS4224C  | 9    |
| BS4326   | 25   |
| BS4531   | 36   |
| BS4532   | 26   |
| BS5000   | 19   |
| BS5201   | 23   |
| BS5420   | 45   |
| BS5421   | 48   |
| BS5422   | 48   |
| BS5423   | 48   |
| BS5501   | 31   |
| BS5502   | 31   |
| BS5510   | 27   |
| BS5530   | 32   |
| BS55301  | 16   |
| BS55302  | 16   |
| BS55303  | 16   |
| BS5531   | 32   |
| BS5532   | 32   |
| BS5535   | 25   |
| BS5550   | 32   |
| BS5551   | 32   |
| BS5552   | 32   |
| BS5553   | 32   |
| BS5562   | 31   |
| BS5563   | 31   |
| BS5582   | 24   |
| BS5582A  | 24   |
| BS5582B  | 24   |
| BS5582C  | 24   |
| BS5582D  | 24   |
| BS5582E  | 24   |
| BS5603   | 29   |
| BS5604   | 29   |

| Part No. | Page |
|----------|------|
| BS5610   | 28   |
| BS5612   | 29   |
| BS5800   | 23   |
| BS5810   | 23   |
| BS5810A  | 23   |
| BS5810B  | 23   |
| BS5810C  | 23   |
| BS5810D  | 23   |
| BS6005   | 42   |
| BS6006   | 42   |
| BS6007   | 42   |
| BS6012   | 47   |
| BS6012A  | 47   |
| BS6012B  | 47   |
| BS6012C  | 47   |
| BS6012D  | 47   |
| BS6012E  | 47   |
| BS6012F  | 47   |
| BS6012G  | 47   |
| BS6012H  | 47   |
| BS6050   | 44   |
| BS6100   | 38   |
| BS6300   | 41   |
| BS6500   | 20   |
| BS6502   | 44   |
| BS6656   | 7    |
| BS6659   | 8    |
| BS6661   | 8    |
| BS6663   | 8    |
| BS6664   | 8    |
| BS6665   | 8    |
| BS6666   | 8    |
| BS6667   | 8    |
| BS6669   | 8    |
| BS6670   | 8    |
| BS67500  | 12   |
| BS7288   | 46   |
| BS7289   | 46   |
| BS7291   | 46   |
| BS7352   | 47   |
| BS7356   | 48   |
| BS7525   | 47   |
| BS8001   | 2    |
| BS80016  | 51   |
| BS80017  | 51   |
| BS80018  | 51   |
| BS80019  | 37   |
| BS8001A  | 2    |
| BS8001B  | 2    |
| BS8001C  | 2    |
| BS8001D  | 2    |
| BS8002   | 2    |
| BS8002A  | 2    |
| BS8002B  | 2    |
| BS8002C  | 2    |
| BS8002D  | 2    |
| BS8002E  | 2    |

| Part No. | Page |
|----------|------|
| BS80031  | 37   |
| BS80032  | 37   |
| BS80034  | 37   |
| BS80040  | 49   |
| BS80056  | 46   |
| BS80057  | 38   |
| BS8006   | 7    |
| BS8008   | 28   |
| BS8117   | 9    |
| BS9035   | 40   |
| BS9036   | 40   |
| BS9037   | 40   |
| BS9041   | 40   |
| BS9101   | 41   |
| BS9102   | 41   |
| BS9103   | 41   |
| BS9132   | 35   |
| BS9133   | 35   |
| BS9134   | 35   |
| BS9135   | 35   |
| BS9144   | 25   |
| BS9145   | 25   |
| BS9200   | 46   |
| BS9201   | 46   |
| BS9202   | 46   |
| BS9314   | 44   |
| BS9401   | 39   |
| BS9404   | 39   |
| BS9484   | 33   |
| BS9500   | 38   |
| BS9506   | 30   |
| BS9621   | 45   |
| BS9651   | 45   |
| BS9725   | 53   |
| BS9728   | 52   |
| BS9729   | 42   |
| BS9730   | 17   |
| BS9730A  | 17   |
| BS9730B  | 17   |
| BS9730C  | 17   |
| BS9731   | 17   |
| BS9731A  | 17   |
| BS9731B  | 17   |
| BS9731C  | 17   |
| BS9732   | 17   |
| BS9732A  | 17   |
| BS9732B  | 17   |
| BS9732C  | 17   |
| BS9827A  | 16   |
| BS9827B  | 16   |
| BS9827C  | 16   |
| BS9827D  | 16   |
| BS9827E  | 16   |
| BS9827F  | 16   |
| BS9827G  | 16   |
| BS9827H  | 16   |
| BS9827J  | 16   |

| Part No.    | Page |
|-------------|------|
| BS9827K     | 16   |
| BS9827L     | 16   |
| BS9827M     | 16   |
| BS9827N     | 16   |
| BS9827P     | 16   |
| BS9827Q     | 16   |
| BS9827R     | 16   |
| BS9827S     | 16   |
| BS9827T     | 16   |
| BS9827U     | 16   |
| BS9827V     | 16   |
| BS9827W     | 16   |
| BS9828      | 5    |
| BS9829      | 5    |
| BS9835      | 36   |
| BS9836      | 36   |
| BS9838      | 36   |
| BS9839      | 54   |
| BS9853      | 11   |
| BS9854      | 12   |
| BS9855      | 12   |
| BS9856      | 12   |
| BS9857      | 12   |
| BS9858      | 12   |
| BS9859      | 12   |
| BS9861      | 11   |
| BS9862      | 11   |
| BS9863      | 11   |
| BS9864      | 11   |
| BS9870      | 24   |
| BS9871      | 24   |
| BS9892      | 20   |
| BS9893      | 21   |
| BS98940     | 21   |
| BS9947      | 5    |
| BS9950      | 13   |
| BS9952      | 29   |
| BS9953      | 29   |
| BSG01685-03 | 51   |
| BSG01685-05 | 51   |
| BSG01685-07 | 51   |
| BSG01685-08 | 51   |
| BSG01685-10 | 51   |
| BSG01685-11 | 51   |
| BSG01685-12 | 51   |
| BSG01685-13 | 51   |
| BSG01686-05 | 52   |
| BSG01686-06 | 52   |
| BSG01686-07 | 52   |
| BSG01686-08 | 52   |
| BSG01686-09 | 52   |
| BSG01686-10 | 52   |



Notes

A series of horizontal dotted lines for taking notes.

## Servicing the Automotive, Industrial and Hardware Markets



### Hose Clamps

- Perforated Band Clamps
- Solid Band Clamps
- T-Bolt Clamps
- Double Ear & Rubber Lined Clamps
- Spring Lock Clamps
- Preform Band & Uniband Clamps
- Vinyl Coated Clamps
- Specialised Clamping Solutions

### Thermostat

- Thermostats (including High-Flow)
- Thermostat Gaskets

### Automotive Caps

- Radiator, Oil Caps & Fuel Caps

### Ignition Parts

- Ignition Coils
- Ignition Modules
- Crank & Cam Angle Sensors
- Pick Up Coils

### Engine Management

- Knock Sensors
- Throttle Position Sensors
- Idle Air Control Valves
- Mass Air Flow Sensors
- Manifold Absolute Pressure Sensors
- Oxygen Sensors

### Switches and Sensors

- Oil Pressure Senders & Sensors
- Water Temperature Senders
- Coolant Temperature Sensors
- Thermo Fan Switches
- Stop Light Switches
- Reverse Light Switches

### Diesel Parts

- Glow Plugs

### Windscreen Wipers

- FlexBlade® Wiper Blades
- FlexConnect® Wiper Blades
- CurveBlade® Wiper Blades
- Complete Front & Rear Wiper Blades
- Plastic & Metal Wiper Refills

### Electrical

- Electronic & Thermal Flashers
- General Relays
- Battery Terminals
- Heater Fan Resistors

### Cable Ties

- Nylon & Stainless Steel

### Driveway Service Products

- Mallory Window Squeegees



### Workshop Tools

- Banding, Clamping & Hose
- Cleaning, Cutting & Shaping
- Diagnostic & Inspection
- Files, Knives & Scissors
- Impact & Striking
- Organisers, Identifiers & Storage
- Panel & Trim
- Pliers, Scrapers & Wrenches
- Screwdrivers, Sockets & Bits
- Sloggers & Podgers

### Mechanical Service Tools

- A/C, Brake & Bearing
- Clutch & Transmission
- Cooling System
- Engine & Exhaust
- Fuel, Hose & Pipe
- Suspension & Steering
- Tyre & Wheel
- Timing Tools

### Measuring & Precision

- Rules, Tapes & Wheels
- Squares, Calipers & Dividers
- Balances, Scales, Specialty Gauges
- Levels, Lasers & Digital Instruments
- Verniers, Dial Indicators, Micrometers
- Bluetooth Measuring

### Electrical Service Tools

- Battery, Circuit & Voltage
- Dashboard & Radio
- Ignition & Spark Plug

### Lubrication Tools

- Cans, Funnels, Pans, Pumps & Syphons
- Grease Guns & Nipples

### Pulling & Extracting

- Automotive, Bearing & Split Collet
- Mechanical & Hydraulic



- Battery Accessories



- Motorcycle Service Tools



- Chisels & Punches
- Scrapers & Wrecking Bars
- Screw Extractors
- Cable & Connector Tools



- Sockets & Spanners



MADE IN GERMANY

- Combination Pliers
- Circlip Pliers
- Water Pump Pliers
- Cutting Nippers
- Carpenter's Pincers
- Concreter's Nippers
- Gripping Pliers
- Cable & Wire Rope Cutters
- Pipe Wrenches
- Tweezers
- Insulated Tools (1000V), Photovoltaic Tools
- Electronics Pliers



### Powertrain Tools

- Engine & Transmission
- Cooling, Fuel & Exhaust

### Chassis Tools

- Brakes, Steering & Suspension
- Wheel & Tyre

### Body Tools

- Body Repair Tools, Hole Cutters
- Sheet Metal & Edge Setters

### Workshop Tools

- Electrical, Inspection
- Stud & Nut

### Torque Tools

- Wrenches, Angle Gauges
- Multipliers, Screwdrivers

### Pullers

- Mechanical, Hydraulic
- Loadstar Heavy Duty
- Slide Hammer, Hub & Stud
- Puller Boards

### Hydraulics

- Pumps, Cylinders
- Jack & Press Kits



- Bolt Cutters, Angular Cutters
- Rod Cutters & Benders
- Cable Cutters
- Concrete Mesh Cutters
- Swaging/Crimping
- Pocket Cutters
- Wire Rope Cutters
- Pipe Wrenches

\*Due to agency licensing agreements, certain brands are not available from Tridon for export markets outside Australia. Please contact Tridon for further information.

For further information contact Tridon Customer Service:

**AUSTRALIA**

Phone: 1300 362 263  
Fax: 1300 656 006  
Email: sales@tridon.com.au  
**tridon.com.au**

**NEW SOUTH WALES**

Head Office  
21 Derby Street  
Silverwater NSW 2128

**VICTORIA**

1/11 Brough Street  
Springvale VIC 3171

**QUEENSLAND**

90 Old Toombul Road  
Northgate QLD 4013

**TOWNSVILLE**

1/44-46 Carmel Street  
Garbutt QLD 4814

**SOUTH AUSTRALIA**

729B Port Road  
Woodville SA 5011

**WESTERN AUSTRALIA**

1/1 President Street  
Welshpool WA 6106

**TASMANIA**

77 Howick Street  
Launceston TAS 7250

**NEW ZEALAND**

Phone: 0508 874 366  
Fax: 0800 943 480  
Email: sales@tridon.co.nz  
**tridon.co.nz**

**AUCKLAND**

3 Tiri Place  
Mt Wellington  
Auckland 1060

**CHRISTCHURCH**

2/200 Annex Road  
Middleton  
Christchurch 8024

EXCLUSIVELY DISTRIBUTED BY

**TRIDON** 

CAT088 © Copyright TRIDON AUSTRALIA PTY. LTD. 2017

A.C.N. 001 398 698 Reproduction of this catalogue in part or full is not permitted without written approval. Illustrations in this catalogue are for identification purposes only and there may be slight variations between the illustration and actual product. Whilst every effort has been made to ensure that the information contained in this catalogue is accurate at the time of printing, TRIDON AUSTRALIA PTY LTD will not accept responsibility should any inaccuracies be contained herein. Reference to O.E. vehicle manufacture product are for identification purpose only.